




项目 item		技术参数 Specification
1	产品型号 Product spec.	RBH100-25-3P-D-F-32 BK
2	额定电流 Rated current	25A
3	导线截面积 Conductor area	2.5mm ² /14AWG
4	额定电压 Rated voltage	690V AC
5	环境温度 Ambient Temperature	-40℃~+85℃
6	接触电阻 Contact resistance	≤0.5mΩ
7	阻燃等级 Flammability	UL94 V-0
8	防尘防水等级 Ingress protection rating	IP68(1m2h mated)
9	插拔寿命 Durability	100 Cycles

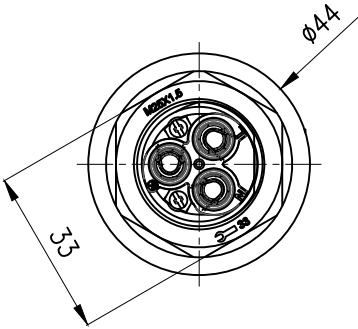

面板安装孔尺寸
mounting hole size on panel



技术要求 Tech. Requirements:
1.螺母扭力: 4.5~5.5N.m;
2.符合RoHS标准 Comply with ROHS standards.

-	-	-	-	-	-	-
-	-	-	-	-	-	-
-	-	-	-	-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved	日期date

未注公差参考GB/T1804-m 0~6±0.1 >6~30±0.2 >30~120±0.3 >120~400±0.5 未注角度公差±1° 未注圆角半径R3 未注尺寸单位mm 第三视角3rd angle projection	设计designed	-	-
	审核checked	-	-
	批准approved	-	-
	材料material		
重量WT.(g)	30.3	比例scale	1 : 1
图幅size	A4	页码sheet	1 / 1

江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
产品名称型号 name & spec.	RBH100-25-3P-D-F-32 BK AC接触器-断路器
图号 drawing no.	C-10400095