




序号	技术参数 Technical data		尺寸 ϕA
1	产品型号 product spec.	RES-P-10/25-D-x-2x-0G	$\phi 16.2$
		RES-P-10/25-D-x-2x-BK	$\phi 17.9$
2	额定电流 Rated current	120A Max.	
3	适配导体截面 Conductor size range	10-25mm ²	
4	额定电压 Rated voltage	1500V DC	
5	接触电阻 Contact resistance	0.5m Ω Max.	
6	防护等级 Degree of protection	IP67	
7	工作温度 Operating temperature	-40℃ ~ +125℃	
8	污染等级 Class of pollution	2级 Gradell	
9	阻燃等级 Flammability	UL94 V-0	
10	颜色 Color/正负极 polarity	橙色0G / "+" (黑色BK / "-")	




RES-P-10/25-D-B-20-0G(BK)
板接式 (腰形孔) BUSBAR TYPE








RES-P-10/25-D-B-21-0G(BK)
板接式 (螺纹孔) BUSBAR TYPE (SCREW)



RES-P-10/25-D-S-20-0G(BK)
螺柱式 SCREW TYPE



RES-P-10/25-D-C-20-0G(BK)
压接管式 CRIMP TYPE

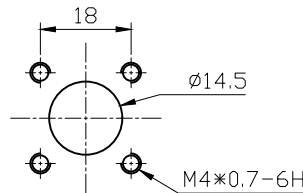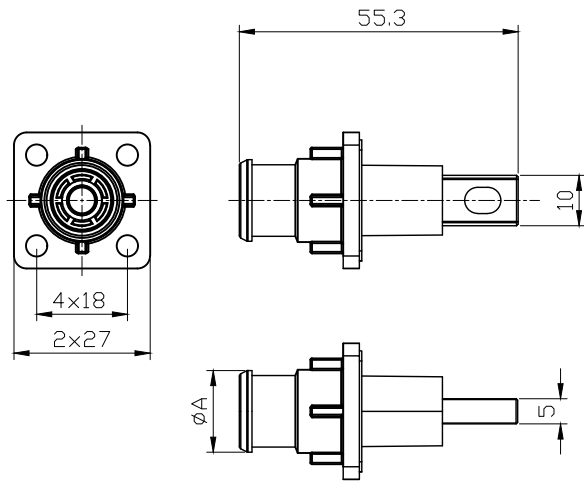

面板安装孔直径
mounting hole size on panel

技术要求 Tech. Requirements:

1.符合RoHS标准; Comply with ROHS standards;


2.机柜安装锁紧扭矩: M4:1.0~1.5N.m;

Installation torque for the locknut: M4:1.0~1.5N.m;

-	-	-
-	-	-
-	-	-
版本rev.	标记mark	处数no.

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c	
0--6 mm	±0.2
6--30 mm	±0.3
30--120 mm	±0.5
角度angle	±1°

第三视角3rd angle projection



设计designed	-	-
审核checked	-	-
批准approved	-	-
材料material	-	
重量WT.(g)		比例scale 1:1.5
图幅size	A4	页码sheet 1 / 1



江西航同电气科技有限公司
Jiangxi Huntect Electrical Technology Co.,Ltd.

产品名称型号 name & spec.	储能连接器-设备端 Energy storage connector Device Side	
	RES-P-10/25-D-x-2x	