
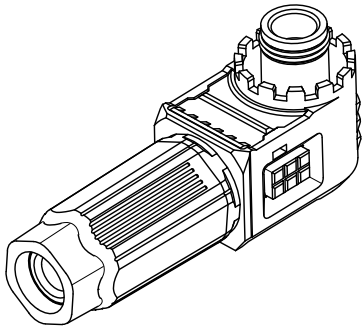
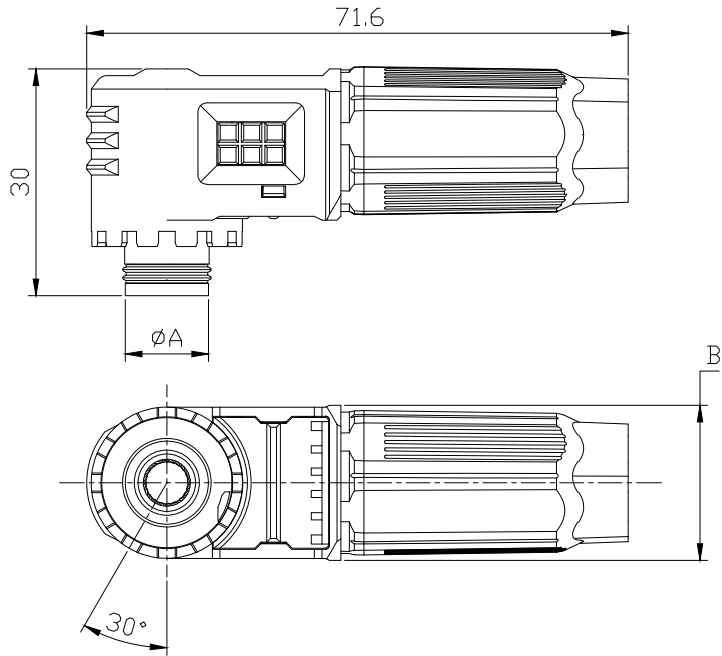


序号	技术参数 Technical data			尺寸 ϕA	尺寸 B
1	产品型号 product spec.	RES-P-25-W-C-20-0G	RES-P-16-W-C-20-0G	$\phi 11$	20.5
		RES-P-25-W-C-20-BK	RES-P-16-W-C-20-BK	$\phi 12.1$	21.4
2	额定电流 Rated current	120A Max.	80A Max.	50A Max.	
3	适配导体截面 Conductor size range	25mm ²	16mm ²	10mm ²	
4	额定电压 Rated voltage	1500V DC	1500V DC	1500V DC	
5	接触电阻 Contact resistance	0.5m Ω Max.	0.5m Ω Max.	0.5m Ω Max.	
6	防护等级 Degree of protection	IP67	IP67	IP67	
7	工作温度 Ambient temperature	-40℃ - +125℃	-40℃ - +125℃	-40℃ - +125℃	
8	污染等级 Class of pollution	2级 Gradell	2级 Gradell	2级 Gradell	
9	阻燃等级 Flammability	UL94 V-0	UL94 V-0	UL94 V-0	
10	颜色 Color/正负极 polarity	橙色0G / "+" (黑色BK / "-")	橙色0G / "+" (黑色BK / "-")	橙色0G / "+" (黑色BK / "-")	



- 技术要求 Tech. Requirements:
- 1.符合RoHS标准; Comply with ROHS standards;
 - 2.接线范围 Cable range: 10-25mm²;

-	-	-
-	-	-
-	-	-
版本rev.	标记mark	处数no.

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0--6 mm ±0.2 6--30 mm ±0.3 30--120 mm ±0.5 角度angle ±1° 第三视角3rd angle projection 	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,LTD.	产品名称型号 name & spec.	储能连接器-线端 Energy storage connector Cable Side RES-P-25-W-C-20
	审核checked	-	-			
	批准approved	-	-			
	材料material	-				
重量WT.(g)		比例scale 1 : 1				
图幅size	A4	页码sheet 1 / 1				