
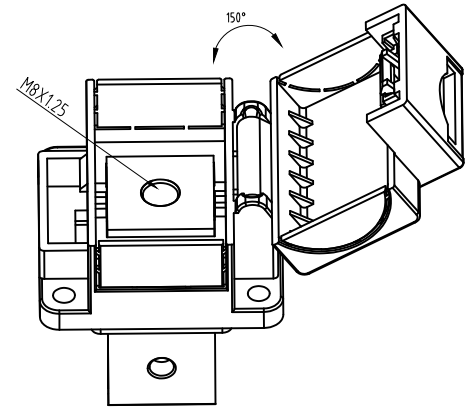
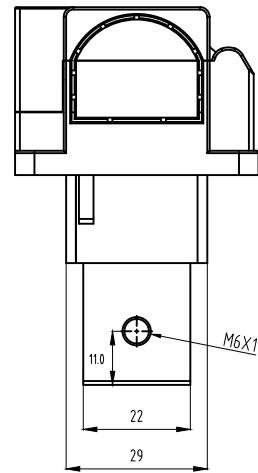
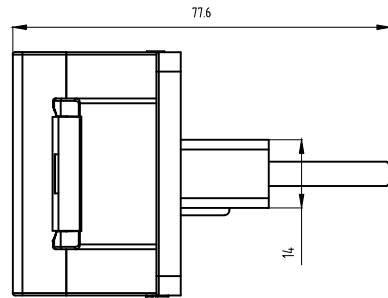



序号No.	产品型号 product spec.	RES-P-35/50-D-B-40 -0G
1	额定电流 Rated current	200A
2	适配电缆导体范围 Cable size range	35mm ² /2AWG,50mm ² /0AWG
3	额定电压 Rated voltage	1500V DC
4	防护等级 Degree of protection	IP5X
5	工作温度 Working temperature	-40℃ ~ 125℃
6	污染等级 Class of pollution	Ⅲ级 GradeⅢ
7	阻燃等级 Flammability	UL94-V0

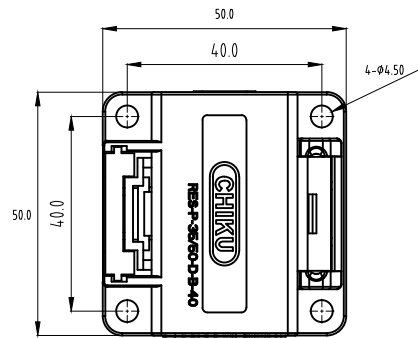

技术要求 Tech. Requirements:

- 1.符合RoHS标准;
Comply with ROHS standards;
- 2.机柜安装锁紧扭矩: M4:1.0-1.5N.m;
Installation torque for the Screw: 1.0-1.5 N.m;
- 3.导体安装: M8: 6-10N.m,M6:5-7N.m;
Conductor installation torque:M8: 6-10N.m,M6:5-7N.m;

-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved 日期date

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0--6 mm ±0.2 6--30 mm ±0.3 30--120 mm ±0.5 角度angle ±1°	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.		
	审核checked	-	-			
	批准approved	-	-			
第三视角3rd angle projection 	材料material	-			产品名称型号 name & spec. <td>储能系统螺钉式高压连接器 (正款) RES-P-35/50-D-B-40-0G Screw type high-voltage connector for energy storage system</td>	储能系统螺钉式高压连接器 (正款) RES-P-35/50-D-B-40-0G Screw type high-voltage connector for energy storage system
	重量WT.(g)	110g	比例scale	1:15		
	图幅size	A4	页码sheet	2/3		