
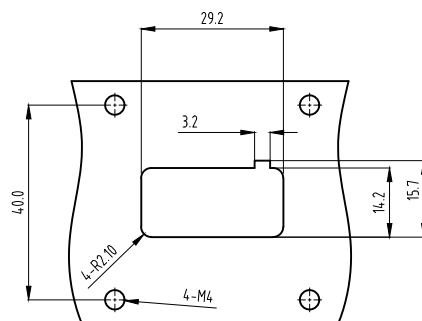

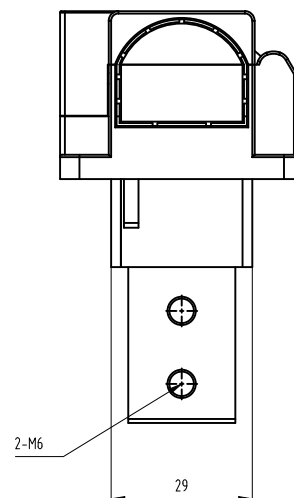
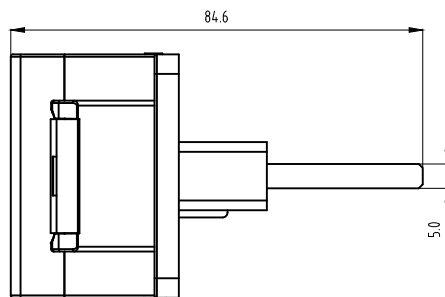


序号No.	产品型号 product spec.	RES-P-35/50-D-B-40-HS-0G
1	额定电流 Rated current	200A
2	适配电缆导体范围 Cable size range	35mm ² /2AWG,50mm ² /0AWG
3	额定电压 Rated voltage	1500V DC
4	防护等级 Degree of protection	IP5X
5	工作温度 Working temperature	-40℃~125℃
6	污染等级 Class of pollution	Ⅲ级 GradeⅢ
7	阻燃等级 Flammability	UL94-V0
8	螺纹孔径 Screw size on busbar	M6X1

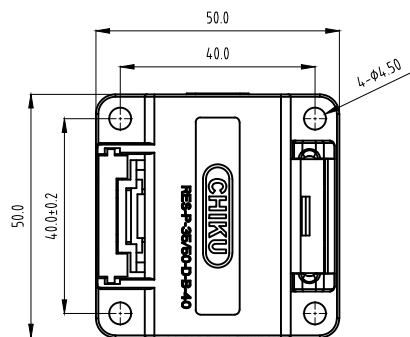

建议开孔尺寸/Hole Size

技术要求 Tech. Requirements:

- 1.符合RoHS标准;
Comply with ROHS standards;
- 2.机柜安装锁紧扭矩: M4:1.0-1.5N.m;
Installation torque for the Screw: 1.0-1.5 N.m;
- 3.导体安装: M8: 6-10N.m,M6:5-7N.m;
Conductor installation torque:M8: 6-10N.m,M6:5-7N.m;

-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0--6 mm ±0.2 6--30 mm ±0.3 30--120 mm ±0.5 角度angle ±1° 第三视角3rd angle projection	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核checked	-	-		
	批准approved	-	-		
	材料material	-			产品名称型号 name & spec.
重量WT.(g)		115g	比例scale	1:15	动力触头触指(插座)-零线 RES-P-35/50-D-B-40-HS-0G
图幅size		A4	页码sheet	/	图号 drawing no.
					4606606069