
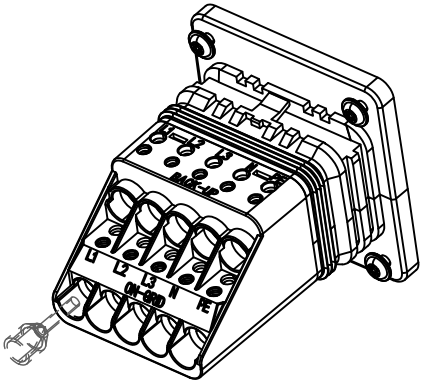
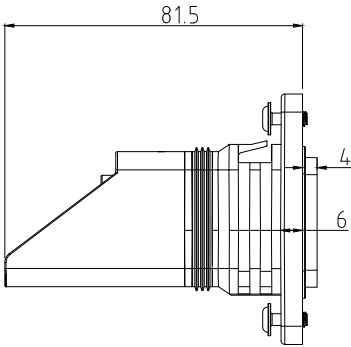




技术参数/Technical Data:

电气性能/Electrical:


- 1.额定电压/Rated Voltage: 1000V AC;
- 2.额定脉冲电压/Rated Impulse Voltage: 6KV;
- 3.额定电流/Rated Current: 50A;
- 4.绝缘阻抗/Insulation Resistance: $\geq 500M\Omega$;
- 5.接触电阻/Contact Resistance: $\leq 2m\Omega$;

机械性能/Mechanical:

- 1.端子保持力/PIN Retention Force: $\geq 80N$;
- 2.电缆保持力/Cable Retention Force: $\geq 120N$;
- 3.适用线规/Wire Size: 机内: 8AWG MAX(软线/R),机外: 10mm²MAX;
- 4.锁线螺丝扭力/Lock Screw Torsion Force: $2\pm 0.1N\cdot m$;

环境性能/Enviromental:

- 1.防护等级/IP rating: IP67(1m0.5h mated);
- 2.工作温度/Operation Temperature: $-40^{\circ}C \sim +85^{\circ}C$;
- 3.防火等级/Flamming Level: UL94-V0;

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.
	审核checked	-	-	
	批准approved	-	-	
	材料material	-		
	第三视角3rd angle projection	重量WT.(g)	比例scale	产品名称型号 name & spec.
	图幅size	A4	图号 drawing no.	10400006
		页码sheet	2 / 3	



-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved 日期date