

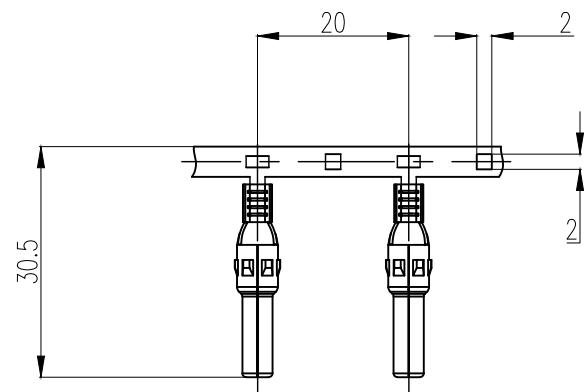
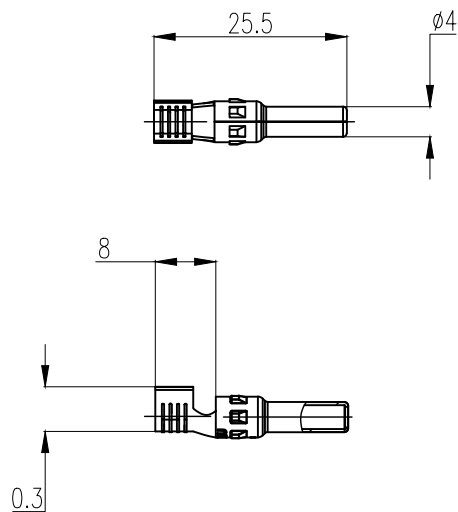




备注note	规格型号spec.	B	H	电缆截面积cable range		额定电流Rated current
公端子 (卷盘装) male tml as reel	RMC-PV-TLR-2.5-M	3.8	4	2.5mm ²	14AWG	25A
	RMC-PV-TLR-4/6-M	5.6	5.9	4mm ² /6mm ²	12AWG/10AWG	35A/45A
	RMC-PV-TLR-10-M	7	7.5	10mm ²	8AWG	50A
公端子 (单件包装) male tml as single piece	RMC-PV-TLS-2.5-M	3.8	4	2.5mm ²	14AWG	25A
	RMC-PV-TLS-4/6-M	5.6	5.9	4mm ² /6mm ²	12AWG/10AWG	35A/45A
	RMC-PV-TLS-10-M	7	7.5	10mm ²	8AWG	50A

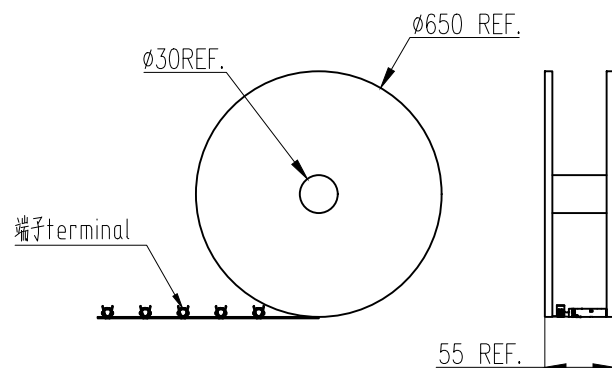

技术要求 Tech. Requirements:

- 符合RoHS标准 Comply with ROHS standards;
- 工作温度/Working temperature: -40℃~105℃.

-	-	-		-	-	-
-	-	-		-	-	-
-	-	-		-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved	日期date

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0--6 mm ±0.2 6--30 mm ±0.3 30--120 mm ±0.5 角度angle ±1° 第三视角 3rd angle projection	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核checked	-	-		
	批准approved	-	-	产品名称型号 name&spec.	公端子 male terminal RMC-PV-TLX-XX-M
	材料material	-	-	图号 drawing no.	C-4604606011
重量WT.(g)		1.1	比例scale	1 : 1	
图幅size		A4	页码sheet	1 / 1	