

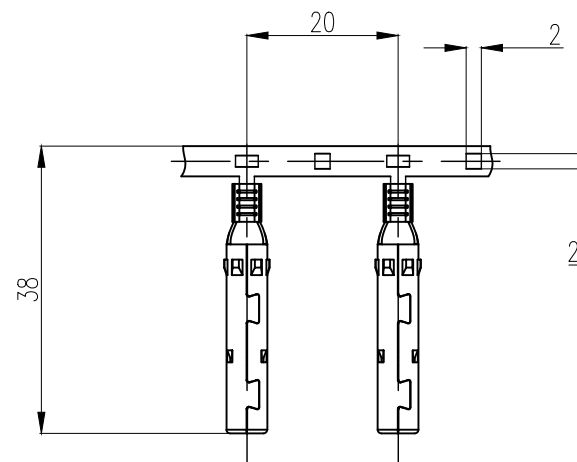


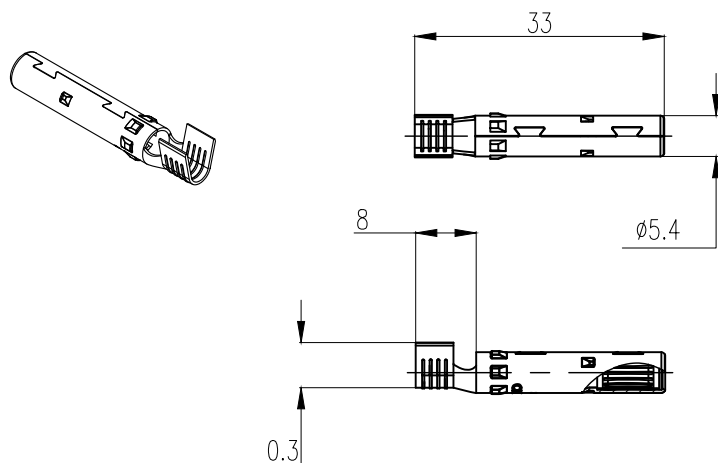

名称 name	规格型号 spec.	B	H	电缆截面积 cable range		额定电流 Rated current
母端子 (卷盘装) female tml as reel	RMC-PV-TLR-2.5-F	3.8	4	2.5mm ²	14AWG	25A
	RMC-PV-TLR-4/6-F	5.6	5.9	4mm ² /6mm ²	12AWG/10AWG	35A/45A
	RMC-PV-TLR-10-F	7	7.5	10mm ²	8AWG	50A
母端子 (单独件袋装) female tml as single piece	RMC-PV-TLS-2.5-F	3.8	4	2.5mm ²	14AWG	25A
	RMC-PV-TLS-4/6-F	5.6	5.9	4mm ² /6mm ²	12AWG/10AWG	35A/45A
	RMC-PV-TLS-10-F	7	7.5	10mm ²	8AWG	50A

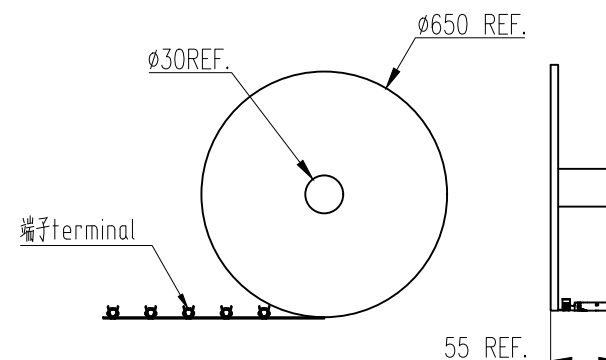


技术要求 Tech. Requirements:

1.符合RoHS标准 Comply with ROHS standards;

2.工作温度/Working temperature: -40℃~105℃.

-	-	-		-	-	-
-	-	-		-	-	-
-	-	-		-	-	-
版本 rev.	标记 mark	处数 no.	变更说明 change description	设计 designed	批准 approved	日期 date

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0--6 mm ±0.2 6--30 mm ±0.3 30--120 mm ±0.5 角度angle ±1°	设计designed		-		-		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	产品名称型号 name&spec.母端子 female fermiant RMC-PV-TLX-XX-F	
	审核checked		-		-				
	批准approved		-		-				
	材料material		-		-				
第三视角 3rd angle projection	重量WT.(g)	1.8	比例Scale	1 : 1		图号 drawing no.		C-4604606010	
	图幅size	A4	页码sheet	1 / 1					