
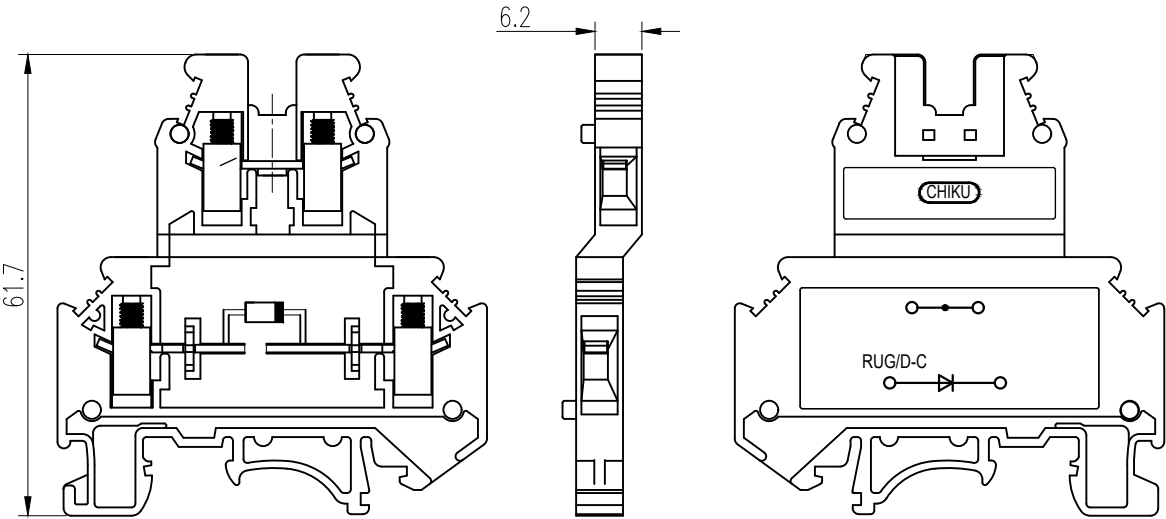


额定电压 Rated voltage (V)	250
标称电流 Nominal current (A)	0.5
反向电压 Max Recurrent Peak Reverse Voltage (V)	1000
适配电线截面 Wire size (mm ²)	0.2-4 rigid, 0.2-2.5 flexible
工作温度 Operating temperature(℃)	-40~+85



未注公差undefined tol 0--10 ±0.3 >10--30 ±0.5 >30--100 ±1.0 >100--250 ±1.5 >250 ±1% 未注角度公差undefined angle ±2° 未注尺寸单位undefined size mm	设计design	-	-	江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	-	-		
	批准approve	-	-		
	材料material	见表格 see table		名称 name	功能端子 function terminal
	重量WT. (g)	/	比例scale 1 : 1	型号 spc.	RUG-D-C
第三视角  3rd angle projection	图幅size	A4	料号 PN.	-	
	页码sheet 1 / 1	图号dwg No.	-	-	