
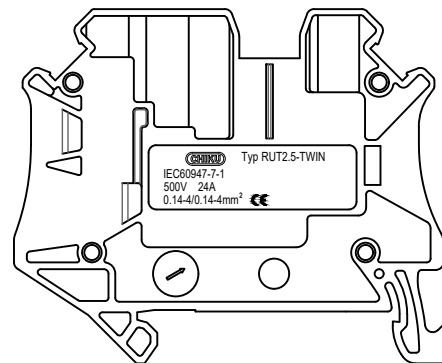
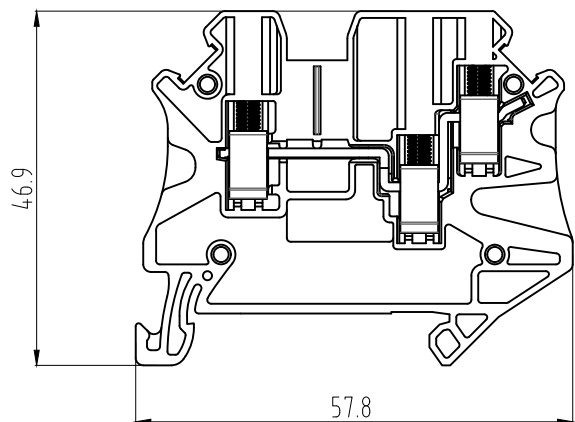




额定电压 Rated voltage (V)	500
额定电流 Rated current (A)	24
适配电线截面 Wire range (mm ²)	0.14-4 rigid, 0.14-4 flexible
适配电线截面 Wire range (AWG)	26-12
工作温度 Operating temperature(°C)	-40~+105

未注公差undefined tol 0--10 ±0.3 >10--30 ±0.5 >30--100 ±1.0 >100--250 ±1.5 >250 ±1%	设计design	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	-	-		
	批准approve	-	-		
	材料material	见表格 see table		名称 name	螺钉式端子Screws terminal
	重量WT. (g)	/	比例scale 1 : 1	型号 spc.	RUT2.5-TWIN
未注角度公差undefined angle ±2° 未注尺寸单位undefined size mm	第三视角 	图幅size	A4	料号 PN.	-
	3rd angle projection	页码sheet 1 / 1	图号dwg No.	-	-