
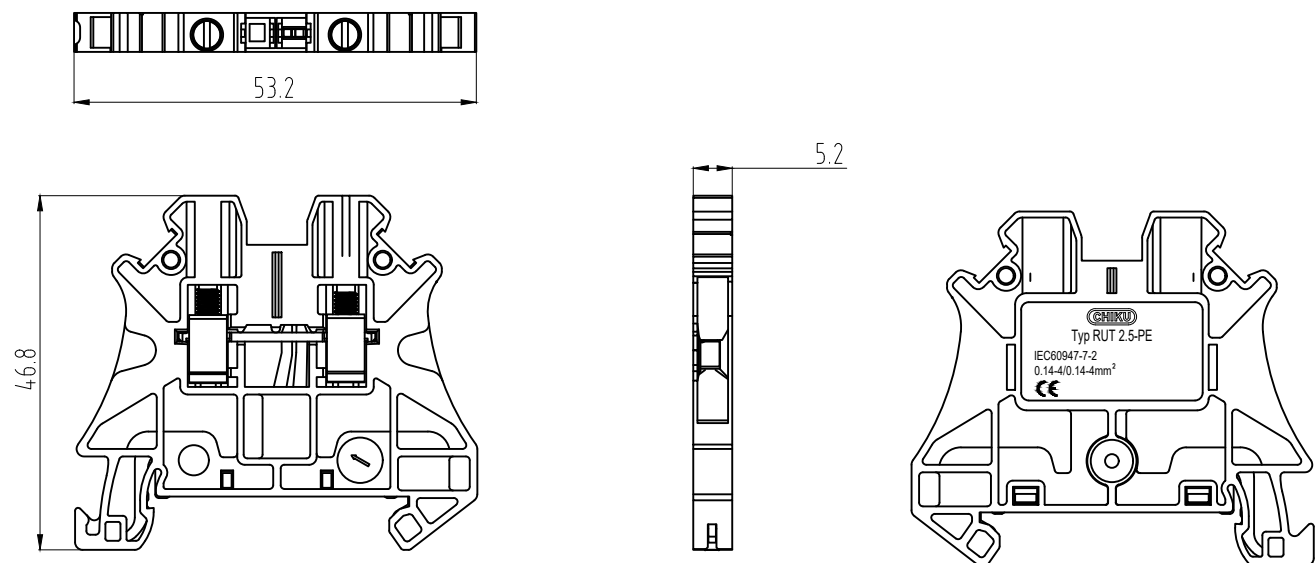




拧紧扭矩Tighting torque(N.m)	0.5-0.6
污染等级 Pollution level	3
适配电线截面 Wire range (mm ²)	0.14-4 rigid, 0.14-4 flexible
适配电线截面 Wire range (AWG)	26-12
工作温度 Operating temperature(℃)	-40~+105

未注公差undefined tol 0--10 ±0.3 >10--30 ±0.5 >30--100 ±1.0 >100--250 ±1.5 >250 ±1% 未注角度公差undefined angle ±2° 未注尺寸单位undefined size mm	设计design		-	-	江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check		-	-		
	批准approve		-	-		
	材料material		见表格 see table		名称 name	螺钉式端子Screws terminal
	重量WT. (g)	/	比例scale	1 : 1	型号 spc.	RUT2.5-PE
第三视角  3rd angle projection	图幅size		A4	料号 PN.	-	
	页码sheet 1 / 1		图号dwg No.		-	