


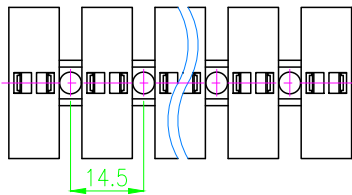
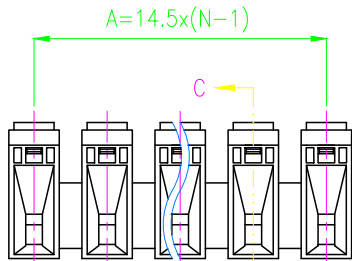
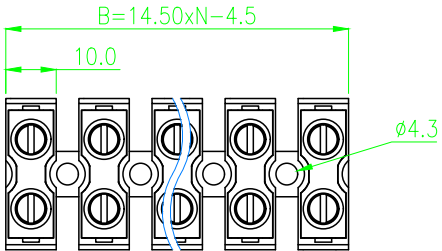


位数Pin	A	B
02	14.50	24.50
03	29.00	39.00
04	43.50	53.50
05	58.00	68.00
06	72.50	82.50
07	87.00	97.00
08	101.50	111.50
09	116.00	126.00
10	130.50	140.50
11	145.00	155.00
12	159.50	169.50
13	174.00	184.00
14	188.50	198.50
15	203.00	213.00



位数	数量(K)
2P	1
3-6P	2
7-15P	3

序号	产品性能参数	数值
1	额定电流	65 A
2	额定电压	600 V
3	工频耐受绝缘电压	3500V AC
4	冲击耐受绝缘电压	8000V
5	承受绝缘电阻	500MΩ/DC500V
6	接线范围	20-8AWG/0.5-10mm ²
7	剥线长度	9-10mm
8	间距	14.50 mm
9	有效位数	2-15P
10	承受扭力矩值	1.7N.m(M5)



技术要求 Tech Requirements:

- 符合RoHS标准Comply with ROHS standard;
- 工作温度范围Operating temperature: -40℃-105℃.

-	-	-		-	-	-
-	-	-		-	-	-
-	-	-		-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准 approved	日期 date

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0--6 mm ±0.2 6--30 mm ±0.3 30--120 mm ±0.5 角度angle ±1° 第三视角3rd angle projection	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核checked	-	-		
	批准approved	-	-		
	材料material				产品名称型号 name & spec.
重量WT.(g)	30.3	比例scale	1:1.15	图号 drawing no.	大电流接线端子 RSC100-65-XXP
图幅size	A4	页码sheet	1 / 1		4001101300