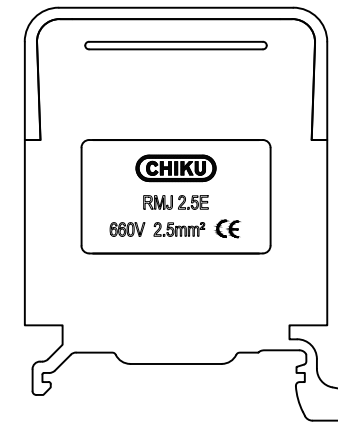
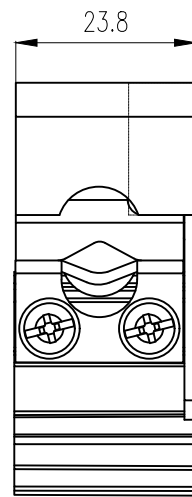
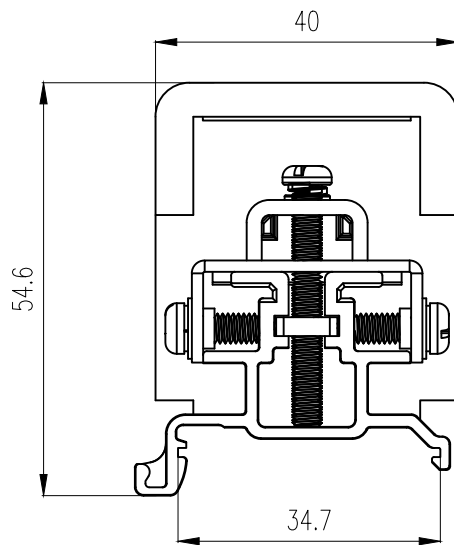



技术要求 Tech Requirements:

- 1、额定电压、电流Rated voltage/current: IEC: 660V 24A.
- 2、额定耐压测试Rated withstand voltage test: AC3000V/min.
- 3、使用温度Service temperature: -40℃~+105℃.
- 4、压线范围Wire range: 进线: $\phi 6-\phi 8$ (刚性导线) 出线: $0.25-2.5\text{mm}^2$ (柔性导线)

-	-	-		-	-	-
-	-	-		-	-	-
-	-	-		-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved	日期date

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0--6 mm ±0.2 6--30 mm ±0.3 30--120 mm ±0.5 角度angle ±1°	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.
	审核checked	-	-	
	批准approved	-	-	
	材料material			
第三视角3rd angle projection 	重量WT.(g)	30.3	比例scale 1 : 1.15	产品名称型号 name & spec. RMJ2.5E 小母线端子
	图幅size	A4	页码sheet 1 / 1	图号 drawing no. 4001101114