


位数PIN	A	B	C	D
02	21.80	36.90	46.90	49.70
03	43.60	58.70	68.70	71.50
04	65.40	80.50	90.50	93.30
05	87.20	102.30	112.30	115.10
06	109.00	124.10	134.10	136.90
07	130.80	145.90	155.90	158.70
08	152.60	167.70	177.70	180.50
09	174.40	189.50	199.50	202.30
10	196.20	211.30	221.30	224.10
11	218.00	233.10	243.10	245.90
12	239.80	254.90	264.90	267.70
13	261.60	276.70	286.70	289.50
14	283.40	298.50	308.50	311.30
15	305.20	320.30	330.30	333.10
16	327.00	342.10	352.10	354.90

单位UNITS: MM

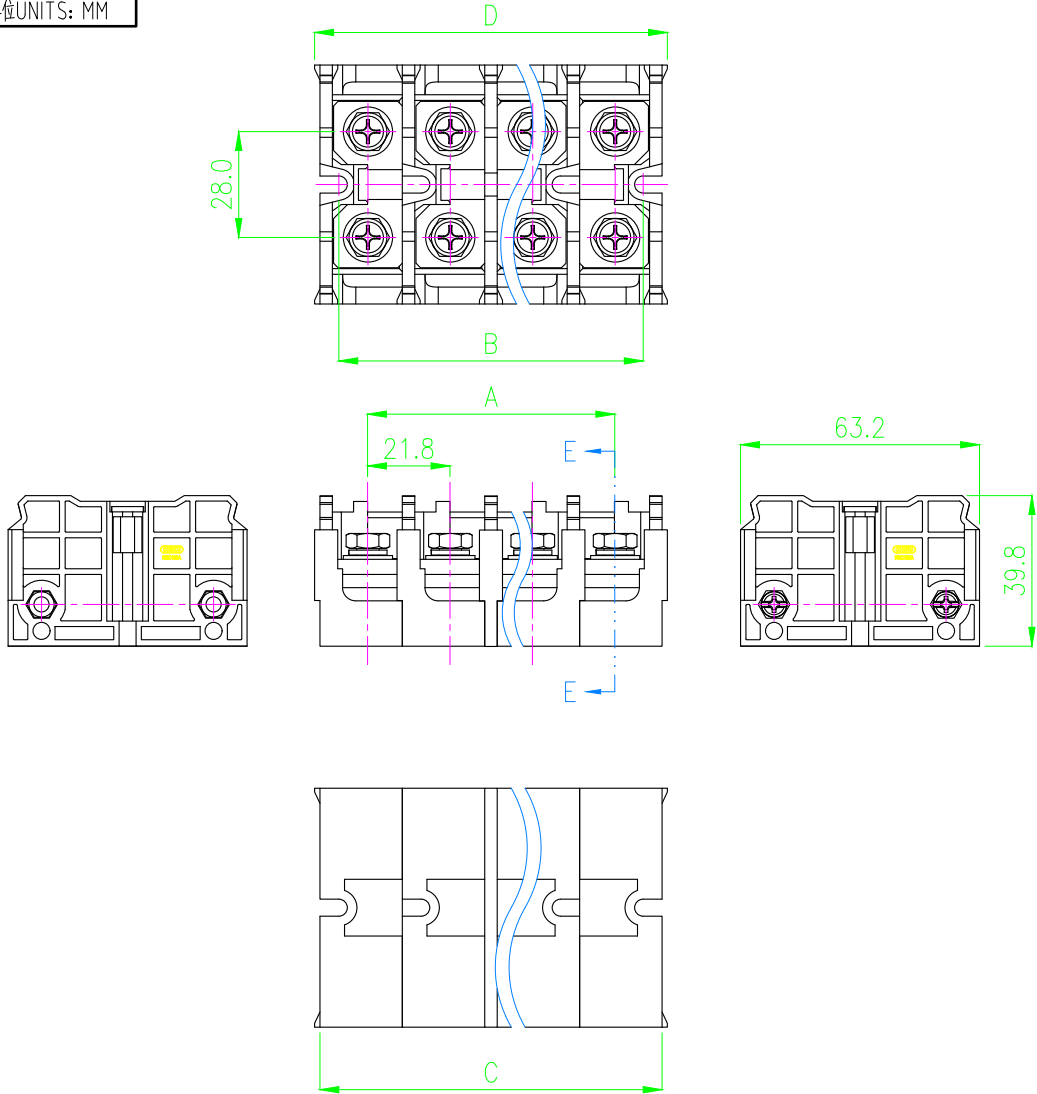


序号No.	产品性能参数 product spec.	数值Value
1	额定电流 Rated current	100 A
2	额定电压 Rated voltage	600 V
3	工频耐受绝缘电压 Withstand dielectric voltage	3500V AC
4	承受绝缘电阻 Withstand insulation resistance	500M Ω /DC500V
5	接线范围 Wire range	20-2AWG/0.5-35mm ²
6	剥线长度 Stripping length	依据端头规格 According to the end specifications
7	间距Pitch	21.8 mm
8	有效位数 Available poles	2-16P
9	承受扭力矩值 Tightening torque	2.8N.m(M6)

技术要求 Tech. Requirements:

- 符合RoHS标准 Comply with RoHS standards.
- 工作温度范围 Working temperature range: -40℃-105℃.

-	-	-	-	-	-
-	-	-	-	-	-
-	-	-	-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved 日期date

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c		设计designed		-		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0--6 mm ±0.3		审核checked		-			
6--30 mm ±0.5		批准approved		-			
30--120 mm ±0.8		材料material		见表格 see table			
角度angle ±1.5°		第三视角 3rd angle projection		重量WT.(g)		名称型号 name&spec.	
				比例scale 1:2		大电流接线端子 RBC100A-XXP-B	
		图幅size		A4		图号 drawing no.	
				页码sheet 1 / 1		C-4001101294	