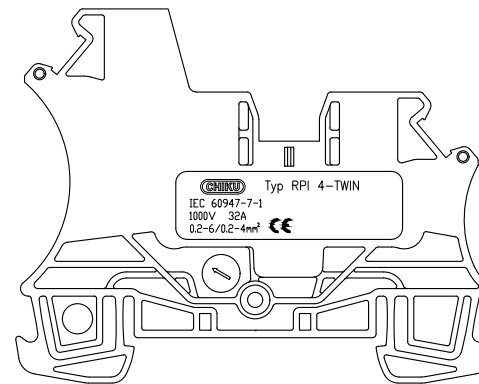

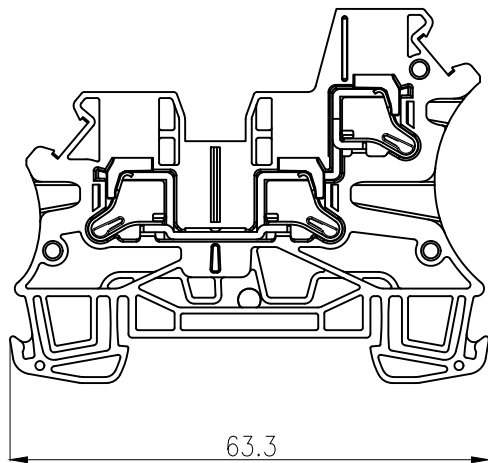


3D View

技术要求 Tech Requirements:

- 1、压线范围The range of the line pressure: IEC: 0.2-6mm²(刚性导线Rigid wire).
0.2-4mm²(柔性导线Flexible wire)。
- 2、使用温度Usage temperature: -40℃~105℃。
- 3、额定耐电压测试Rated withstand voltage test:AC3500V/min。
- 4、额定电压rated voltage, 电流Electric current: 1000V 24A。

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	页数no.		设计design	批准approve	日期date

未注公差undefined tol	设计design	—	—	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.		
0--10 0.3	审核check	—	—			
>10--30 0.5	批准approve	—	—			
>30--100 1.0	材料material	/				
>100--250 1.5	重量W.T. (g)	/	比例scale	1:1	名称 name	RPI 4-TWIN
>250 1%	第三视角		图幅size			
未注角度公差undefined angle 2°	3rd angle projection		页码sheet	/	图号dwg No	4006105015
未注尺寸单位undefined size mm						