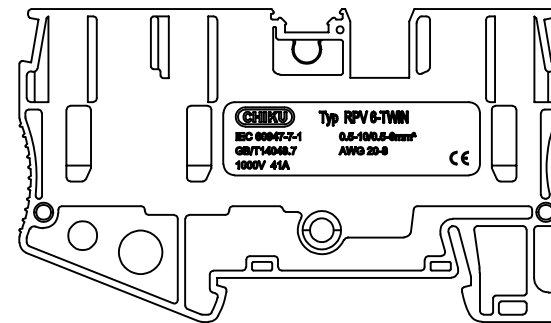
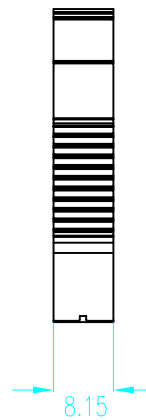
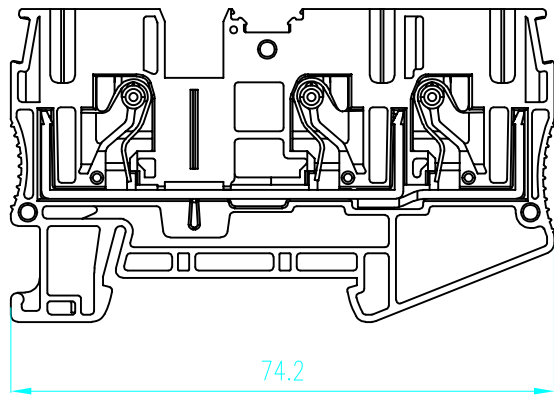
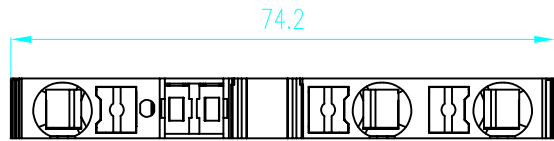


3D View

技术要求 Tech Requirements:

- 1、压线范围The range of the line pressure: 0.5-10mm²/0.5-6mm².
- 2、额定电压Rated voltage, 电流Electric current: IEC1000V 41A.
- 3、额定耐压测试Rated withstand voltage test: AC3500V/min.
- 4、使用温度Usage temperature: -40℃~+105℃.

—	—	—		—	—	—	未注公差undefined tol	设计design	—	—	江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.	
—	—	—		—	—	—	0--10 0.3	审核check	—	—		
—	—	—		—	—	—	>10--30 0.5	批准approve	—	—		
—	—	—		—	—	—	>30--100 1.0	材料material	/			
—	—	—		—	—	—	>100--250 1.5	重量WT. (g)	/	比例scale 1:1		
—	—	—		—	—	—	>250 1%	第三视角		图幅size	名称 name	RPV6-TWIN-上直插弹簧接线端子
版本rev.	标记mark	处数no.		设计design	批准approve	日期date	未注角度公差undefined angle 2°	第三视角	3rd angle projection	图号sheet /	图号dwg No.	Directly insert spring terminal block
							未注尺寸单位undefined size mm					4006105046