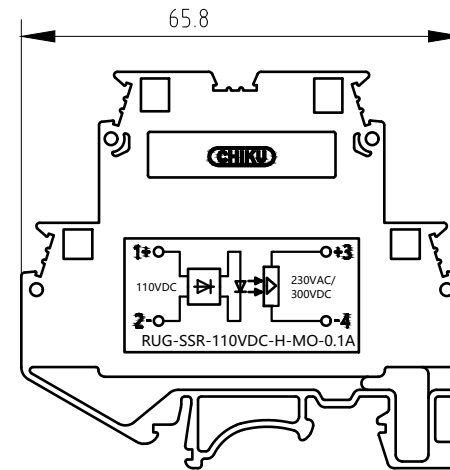
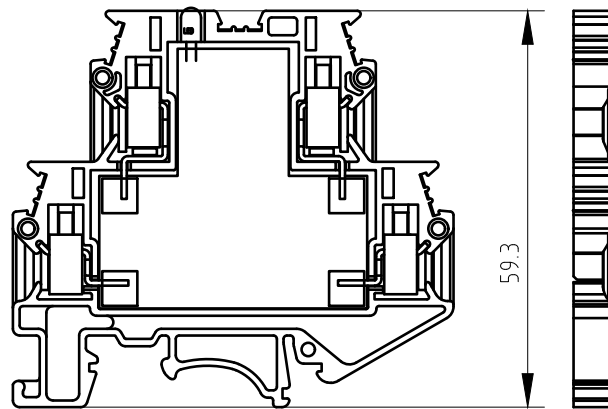


3D View

技术参数 Technical parameters:

1. 螺丝型号 Screw type/扭力要求 torque requirement: M3 0.8N·m.
2. 压线范围 Wiring range : IEC:0.2-6mm²(刚性导线 rigid conductor)
0.2-4mm²(柔性导线 flexible conductors) 24-10AWG.
3. 使用温度 operating temperature: -25℃~+50℃.

—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—
版本 rev.	标记 mark	处数 no.	设计 design	批准 approve	日期 date	—

未注公差undefined tol	设计design	—	—		江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0-10 0.3	审核check	—	—			
>10--30 0.5	批准approve	—	—	固态继电器端子 Solid State Relay Terminals		
>30--100 1.0	材料material	/				
>100--250 15	重量W.T. (g)	/	比例scale 1:1	名称 name	RUG-SSR-110VDC-H-MO-0.1A	
>250 1%	第三视角 3rd angle projection		图幅size	型号 spc.	—	
未注角度公差undefined angle 2°	页码sheet	/	图号dwg No.	—		
未注尺寸公差undefined size mm						