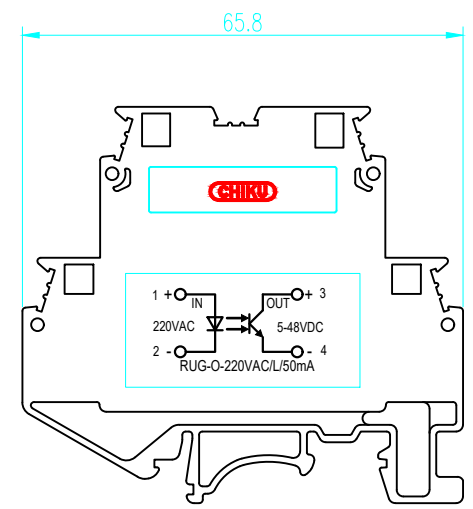

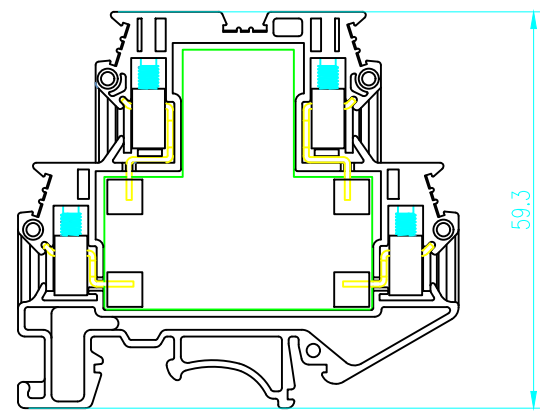
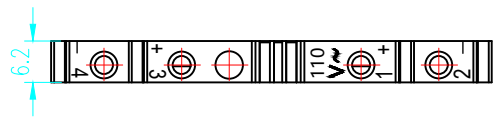


3D View

技术参数Technical parameters:
1.螺丝型号Screw type/扭力要求torque requirement: M3 0.8N·m.
2.压线范围Wiring range : IEC:0.2-6mm²(刚性导线rigid conductor)
0.2-4mm²(柔性导线Flexible conductors) 24-10AWG.
3.使用温度operating temperature: -25℃~+50℃.

—	—	—	—	—	—
—	—	—	—	—	—
—	—	—	—	—	—
版本rev.	标记mark	处数no.	设计design	批准approve	日期date

未注公差undefined tol		设计design				江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.	
0--10	0.3	审核check					
>10--30	0.5	批准approve		名称 name 光耦端子			
>30--100	1.0	材料material					
>100--250	1.5	重量W.T. (g)		Optocoupler terminals			
>250	1%						
未注角度公差undefined angle 2°		第三视角		比例scale	1:1	型号 spc. RUG-O-220VAC/L/50mA	
未注尺寸公差undefined size mm		3rd angle projection		图幅Size			
				页码sheet /	图号dwg No.	—	