


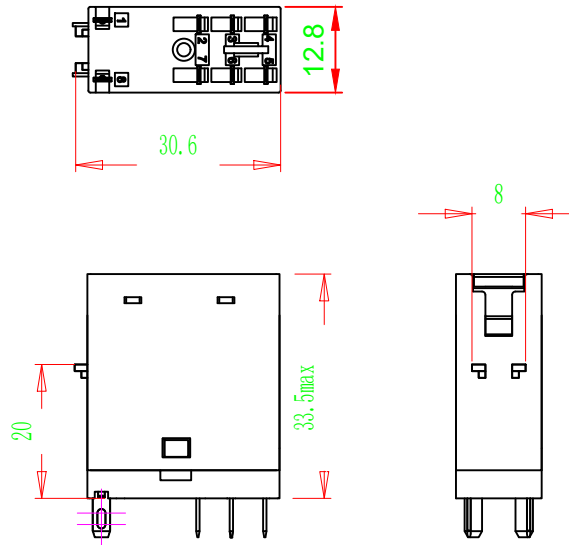

技术要求technical requirement

- 1.使用环境温度working Ambient temperature: -40°C~+55°C
- 2.额定负载Rated load: AC277V 8A;DC30V 8A
- 3.额定通电流rated current: 8A
- 4.最大的切换功率Maximum power: 2200VA/240W
- 5.触点电流的最大值Contact current max: 8A

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol 0--10 0.3 >10--30 0.5 >30--100 1.0 >100--250 1.5 >250 1% 未注角度公差undefined angle 2° 未注尺寸公差undefined size mm	设计design	—	—	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	—	—		
	批准approve	—	—		
	材料material	/		名称 name	紧凑型功率继电器
	重量W.T. (g)	比例scale	1:1	型号 spc.	Compact power relay
第三视角		图幅size	—	图号dwg No.	—
3rd angle projection		页码sheet	/		