


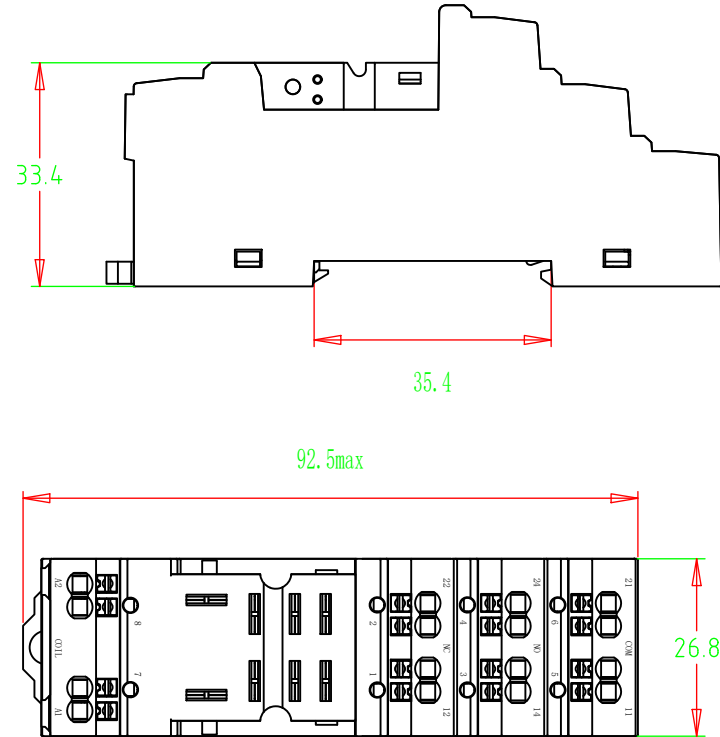

技术要求technical requirement

- 1.额定负载Rated load: 300VAC 16A
- 2.介质耐压Medium voltage resistance 线圈/触点Coil/Contact: 4000 V/s; 触点间the contact space: 2500 V/s
- 3.连接导线connecting lead: 0.25mm²...2.5mm²/22...14AWG
- 4.剥线长度Stripped Wire Length: 10...12mm/0.43in

—	—	—
—	—	—
—	—	—
版本rev.	标记mark	处数no.

—	—	—
—	—	—
—	—	—
设计design	批准approve	日期date

未注公差undefined tol		设计design		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0--10 0.3		审核check			
>10--30 0.5		批准approve			
>30--100 1.0		材料material			
>100--250 1.5		重量W.T. (g)			
>250 1%		比例scale 1:1			
未注角度公差undefined angle 2°		第三视角 		名称 name	
未注尺寸公差undefined size mm		3rd angle projection		通用型功率继电器插座	
				General Purpose Power Relay Socket	
				型号 spc.	
				图号 sheet /	
				图号 dwg No.	
				SRL-2SP	
				—	