
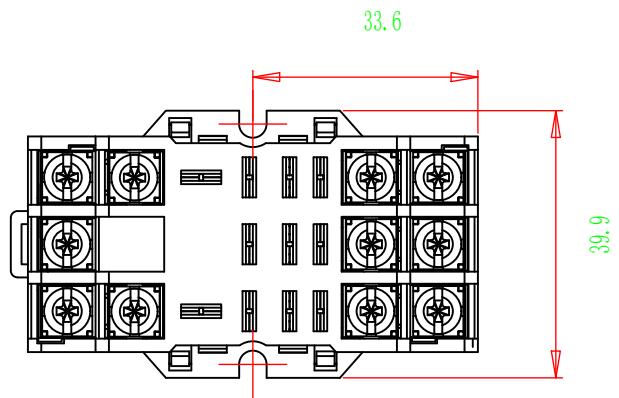


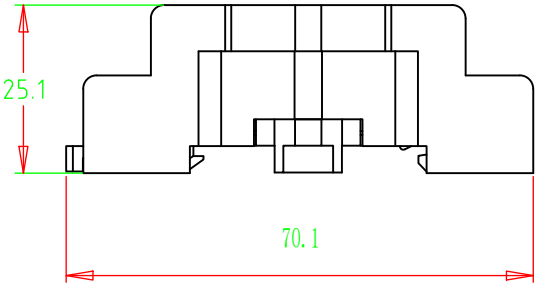

技术要求technical requirement
1使用环境温度working Ambient temperature: -40℃~+85℃
2额定负载Rated load: 300VAC 10A
3介电耐压Medium voltage resistance 线圈/触点Coil/Contact: 2000 V/s; 触点间the contact space: 2000 V/s
4螺钉扭矩Screw torque: 1.0 N·M
5.连接导线connecting lead: 20-14/0.5-2.5AWG/mm²

—	—	—	—	—	—
—	—	—	—	—	—
—	—	—	—	—	—
版本rev.	标记mark	数量no.	设计design	批准approve	日期date

未注公差undefined tol	设计design	—	—	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.
0--10 0.3	审核check	—	—	
>10--30 0.5	批准approve	—	—	
>30--100 1.0	材料material	/		名称 name
>100--250 1.5	重量W.T. (g)	/	比例scale 1:1	通用型功率继电器插座
>250 1%	第三视角		图幅size —	型号 spc. General Purpose Power Relay Socket
未注角度公差undefined angle 2°	3rd angle projection	页码sheet /	图号dwg No.	SRL-3E-N
未注尺寸单位undefined size mm				—