


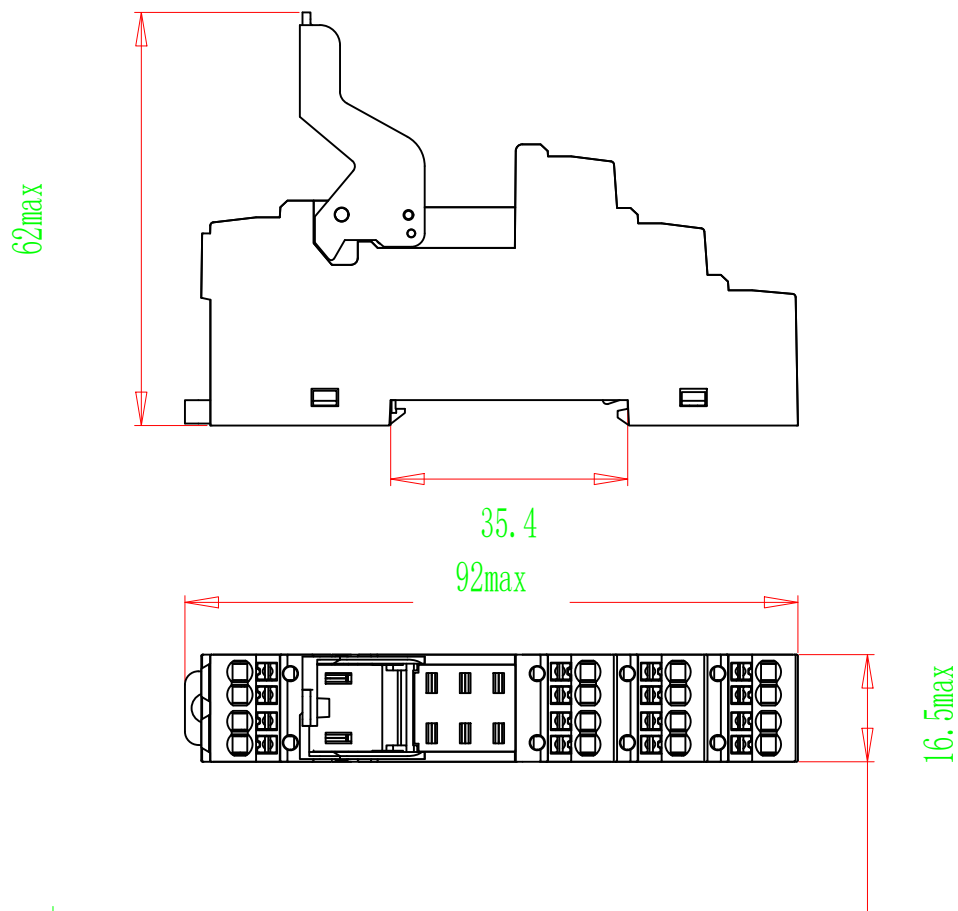

技术要求technical requirement

- 1.额定负载电流、电压Rated load current, voltage:10A 300VAC
- 2.介质耐压线圈/触点Dielectric withstand voltage coils/contacts:4000V/S
- 3.介质耐压触点间Dielectric withstand pressure between contacts:2500VS
- 4.使用环境operating environment:-40°C~+85°C
- 5.外接连接导线External connecting leads:0.25mm²-2.5mm²/22-14AWG
- 6.剥线长度Stripped Wire Length: 10-12mm/0.43in

—	—	—	—	—	—
—	—	—	—	—	—
—	—	—	—	—	—
版本rev.	标记mark	处数no.	设计design	批准approve	日期date

未注公差undefined tol 0--10 0.3 >10--30 0.5 >30--100 1.0 >100--250 1.5 >250 1% 未注角度公差undefined angle 2° 未注尺寸公差undefined size mm	设计design	—	—	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.
	审核check	—	—	
	批准approve	—	—	
	材料material	—	—	
	重量W.T. (g)	—	—	
第三视角 3rd angle projection	图幅size	—	—	名称 name 插座 Sockets
	图号sheet /	—	—	型号 spc. SRJ-2SP
		—	—	图号dwg No. —