


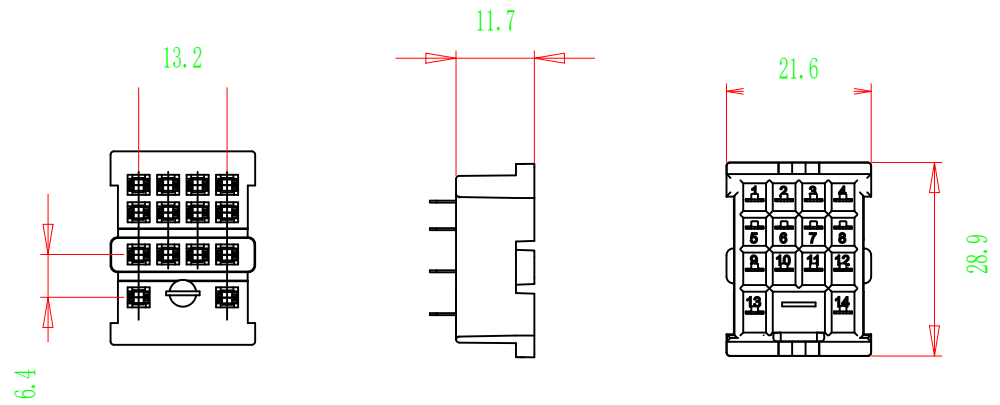

技术要求technical requirement

- 1.额定负载电流Rated load current: 10A
- 2.额定负载电压Rated load voltage: 300VAC
- 3.触点contact (elec.): 200VAC
- 4.触点间距the contact space: 200VAC

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol		设计design		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0--10	0.3	审核check			
>10--30	0.5	批准approve			
>30--100	1.0	材料material			
>100--250	1.5	重量W.T. (g)			
>250	1%				
未注角度公差undefined angle 2°		第三视角		名称 name	
未注尺寸公差undefined size mm		3rd angle projection		通用型功率继电器插座	
				General Purpose Power Relay Socket	
				比例scale 1:1	
				图幅size	
				型号 spc.	
				SRM-4P	
				页码sheet /	
				图号dwg No.	
				—	