
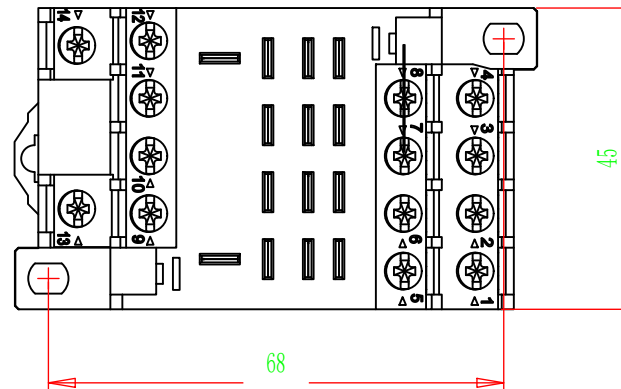


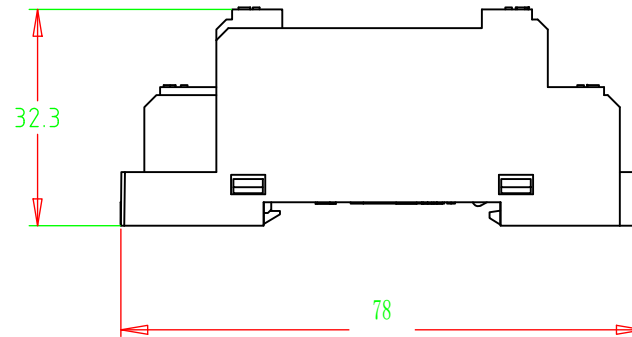

技术要求technical requirement

- 1.使用环境温度working Ambient temperature: -40°C~+85°C
- 2.额定负载Rated load: 300VAC 16A
- 3.介质耐压Medium voltage resistance 线圈/触点Coil/Contact: 2000 V/s; 触点间the contact space: 2000 V/s
- 4.螺钉扭矩Screw torque: 1.0 N·M
- 5.连接导线connecting lead: 20-14/0.5-2.5AWG/mm²

—	—	—
—	—	—
—	—	—

版本rev. 标记mark 处数no.

设计design 批准approve 日期date

未注公差undefined tol		设计design		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0~10	0.3	审核check			
>10~30	0.5	批准approve			
>30~100	1.0	材料material			
>100~250	1.5	重量W.T. (g)			
>250	1%	比例scale 1:1		名称 name	通用型功率继电器插座
				型号 spc.	General Purpose Power Relay Socket
未注角度公差undefined angle 2°				图号 dwg No.	SRL-4E
未注尺寸公差undefined size mm		3rd angle projection		页码sheet /	—