


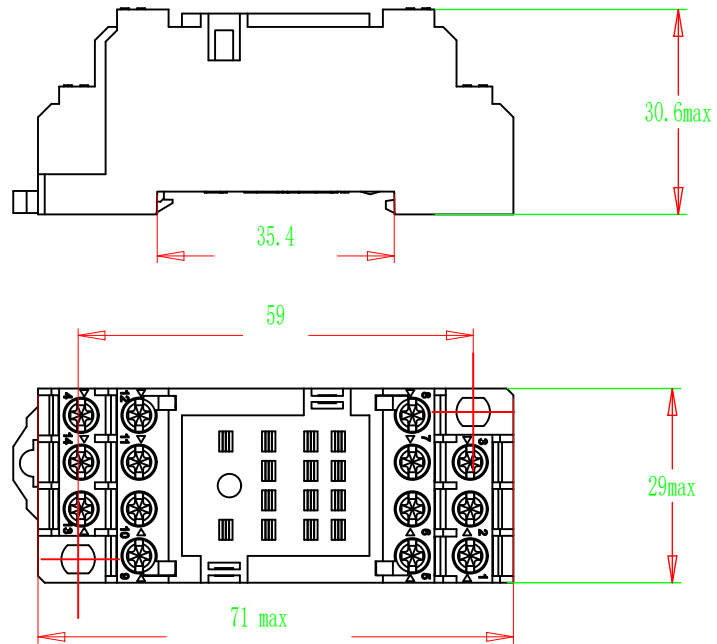

技术要求technical requirement

- 1.额定负载电流Rated load current: 7A
- 2.额定负载电压Rated load voltage: 300VAC
- 3.触点contact (elec.): 200V/s
- 4.触点间距the contact space: 200V/s
- 5.螺钉扭矩Screw torque: 1.0N.m
- 6.外接连接导线External connection wire: 20-14/0.5-2.5AWG/mm²

—	—	—	—	—	—
—	—	—	—	—	—
—	—	—	—	—	—
版本rev.	标记mark	处数no.	设计design	批准approve	日期date

未注公差undefined tol		设计design		江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.	
0--10 0.3		审核check			
>10--30 0.5		批准approve			
>30--100 1.0		材料material			
>100--250 1.5		重量WT. (g)			
>250 1%		比例scale 1:1		名称 name	
未注角度公差undefined angle 2°		第三视角 		通用型功率继电器插座	
未注尺寸公差undefined size mm		3rd angle projection		General Purpose Power Relay Socket	
		图幅size /		型号 spc.	
		顶鸣sheet /		SRM-4E	
				—	