


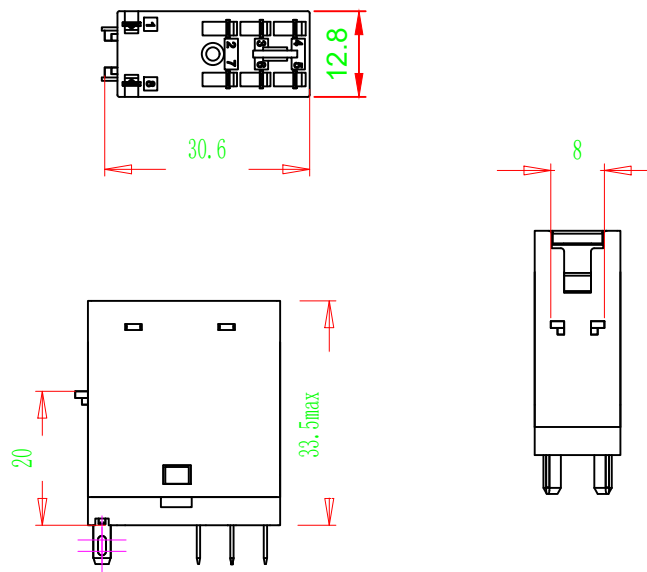

技术要求technical requirement

- 1.使用环境温度working Ambient temperature: $-40^{\circ}\text{C}\sim+55^{\circ}\text{C}$
- 2.额定负载Rated load: AC277V 8A;DC30V 8A
- 3.额定通电流rated current: 8A
- 4.最大的切换功率Maximum power: 2200VA/240W
- 5.触点电流的最大值Contact current max: 8A

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol		设计design		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,L	
0~10	0.3	审核check			
>10~30	0.5	批准approve			
>30~100	1.0	材料material			
>100~250	1.5	重量W.T. (g)			
>250	1%	比例scale 1:1		名称 name	紧凑型功率继电器
未注角度公差undefined angle 2°		第三视角 		型号 spc.	Compact power relay ARJ-2C230ALT
未注尺寸公差undefined size mm		3rd angle projection		图号 dwg No.	—