


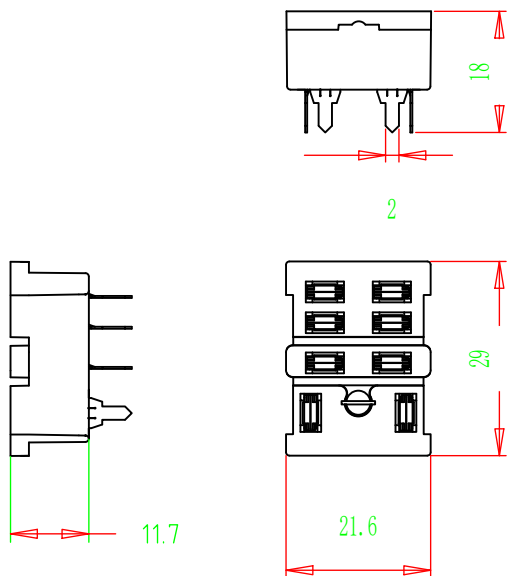

技术要求technical requirement

- 1.使用环境温度working Ambient temperature: -40℃~+85℃
2.额定负载Rated load: 300VAC 10A

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol		设计design		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0--10	0.3	审核check			
>10--30	0.5	批准approve		通用型功率继电器插座 General Purpose Power Relay Socket	
>30--100	1.0	材料material			
>100--250	1.5	重量W.T. (g)		名称 name	
>250	1%	/		比例scale	1:1
未注角度公差undefined angle 2°		第三视角		图幅size	— 型号 spc.
未注尺寸公差undefined size mm		3rd angle projection	页码sheet /	图号dwg No.	SRL-2P