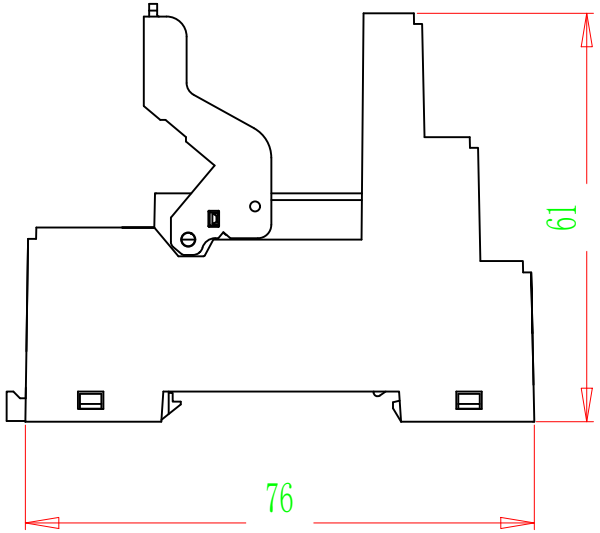

技术要求technical requirement

1.额定负载电流、电压Rated load current, voltage:16A 300VAC
2.介质耐压线圈/触点Dielectric withstand voltage coils/contacts:4000V/S
3.介质耐压触点间Dielectric withstand pressure between contacts:2500VS
4.螺钉扭矩Screw torque:1.0N.m
5.外接连接导线External connecting leads:20-14/0.5-2.5AWG/mm^2
6.使用环境operating environment:-40°C~+85°C

版本rev.	标记mark	处数no.		设计design	批准approve	日期date
—	—	—		—	—	—
—	—	—		—	—	
—	—	—		—	—	—

未注公差undefined tol	
0--10	0.3
>10--30	0.5
>30--100	1.0
>100--250	1.5
>250	1%
未注角度公差undefined angle	2°
未注尺寸单位undefined size	mm

设计design	—	—	
审核check	—	—	
批准approve	—	—	
材料material	/		
重量WT. (g)	/	比例scale	1:1
第三视角 3rd angle projection		图幅size	—
		页码sheet	/

江西航同电气科技有限公司
Jiangxi Huntec Electrical Technology Co.,Ltd.

名称 name	插座 Sockets
型号 spc.	SRJ-1S
图号dwg No.	—

江西航同电气科技有限公司
Jiangxi Huntec Electrical Technology Co.,Ltd.