


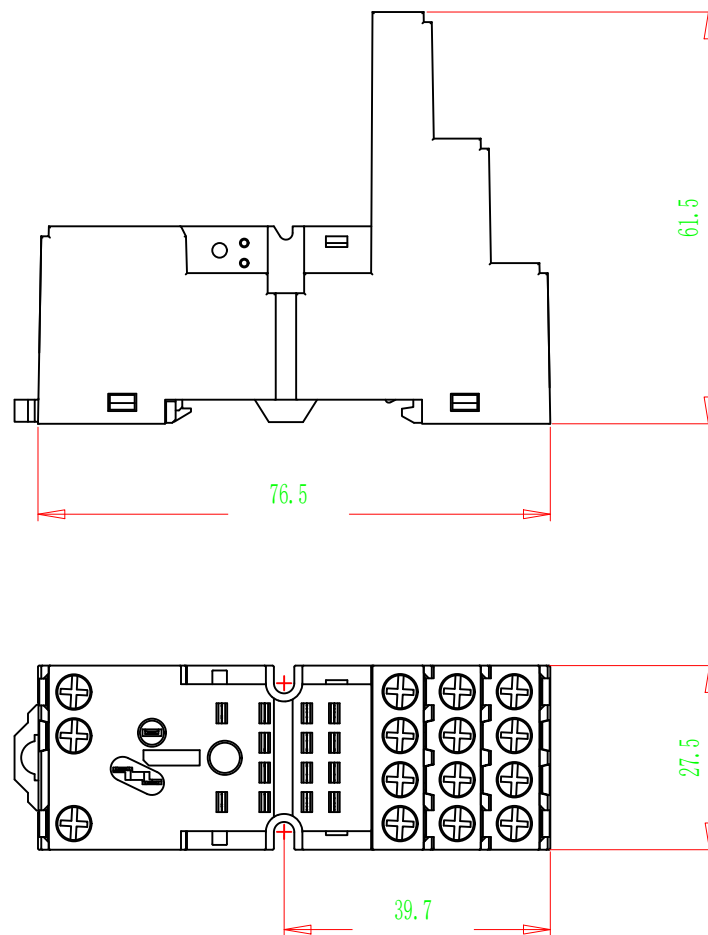

技术要求technical requirement
1.额定负载电流Rated load current: 10A
2.额定负载电压Rated load voltage: 300VAC
3.触点contact (elec.): 4000V/s
4.触点间距the contact space: 2500V/s
5.螺钉扭矩Screw torque: 1.0N.m
6.外接连接导线External connection wire: 20-14/0.5-2.5AWG/mm²

—	—	—	—	—	—
—	—	—	—	—	—
—	—	—	—	—	—
版本rev.	标记mark	处数no.	设计design	批准approve	日期date

未注公差undefined tol		设计design			江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.	
0~10	0.3	审核check				
>10~30	0.5	批准approve				
>30~100	1.0	材料material				
>100~250	1.5	重量W.T. (g)				
>250	1%		比例scale	1:1	名称 name	通用型功率继电器插座
未注角度公差undefined angle 2°		第三视角		图幅size	型号 spc.	General Purpose Power Relay Socket
未注尺寸公差undefined size mm		3rd angle projection	页码sheet /	图号dwg No.	SRM-4S	