


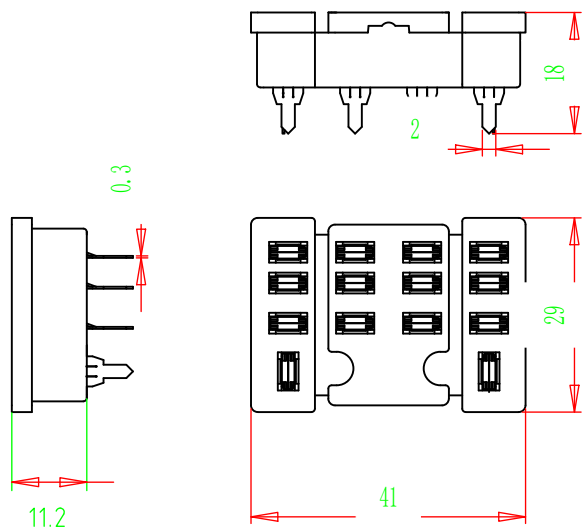

技术要求technical requirement

- 1.使用环境温度working Ambient temperature: -40°C~+85°C
- 2.额定负载Rated load: 300VAC 10A

—	—	—	—	—	—
—	—	—	—	—	—
—	—	—	—	—	—
版本rev.	标记mark	处数no.	设计design	批准approve	日期date

未注公差undefined tol		设计design			江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0--10	0.3	审核check				
>10--30	0.5	批准approve		通用型功率继电器插座		
>30--100	1.0	材料material				
>100--250	1.5	重量W.T. (g)	比例scale 1:1	名称 name	General Purpose Power Relay Socket	
>250	1%			型号 spc.	SRL-4P	
未注角度公差undefined angle 2°	第三视角		图幅size	图号 dwg No.		
未注尺寸公差undefined size mm	3rd angle projection	页码sheet /				