


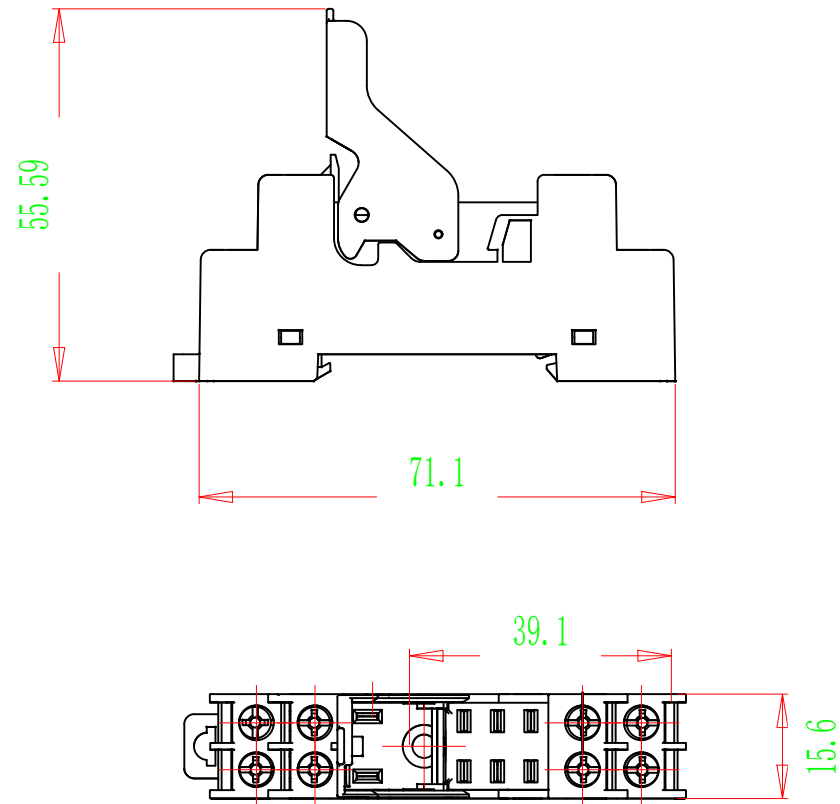

技术要求technical requirement

- 1.额定负载电流、电压Rated load current, voltage:10A 300VAC
- 2.介质耐压线圈/触点Dielectric withstand voltage coils/contacts:4000V/S
- 3.介质耐压触点间Dielectric withstand pressure between contacts:2500VS
- 4.螺钉扭矩Screw torque:1.0N.m
- 5.外接连接导线External connecting leads:20-14/0.5-2.5AWG/mm²
- 6.使用环境operating environment:-40℃~+85℃

—	—	—
—	—	—
—	—	—
版本rev.	标记mark	处数no.

设计design 批准approve 日期date

未注公差undefined tol	设计design	—	—	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.
0--10 0.3	审核check	—	—	
>10--30 0.5	批准approve	—	—	
>30--100 1.0	材料material	/		名称 name
>100--250 1.5	重量W.T. (g)	比例scale	1:1	插座
>250 1%	第三视角	图幅size	—	型号 spc.
未注角度公差undefined angle 2°	第三视角	页码sheet	/	图号dwg No.
未注尺寸公差undefined size mm	3rd angle projection	页码sheet	/	图号dwg No.