


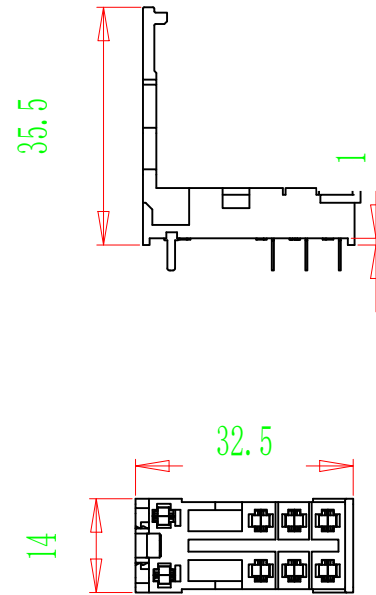

技术要求technical requirement

- 1.额定负载电流、电压Rated load current, voltage:10A 300VAC
- 2.介质耐压线圈/触点Dielectric withstand voltage coils/contacts:4000V/S
- 3.介质耐压触点间Dielectric withstand pressure between contacts:2500VS
- 4.使用环境operating environment:-40℃~+85℃

—	—	—
—	—	—
—	—	—

版本rev.	标记mark	处数no.

设计design	批准approve	日期date
----------	-----------	--------

未注公差undefined tol	设计design	—	—	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co., Ltd.
0--10 0.3	审核check	—	—	
>10--30 0.5	批准approve	—	—	
>30--100 1.0	材料material	—	—	
>100--250 1.5	重量W.T. (g)	—	—	名称 name
>250 1%	第三视角	—	—	插座
未注角度公差undefined angle 2°	第三视角	—	—	型号 spc.
未注尺寸公差undefined size mm	第三视角	—	—	图号 dwg No.