


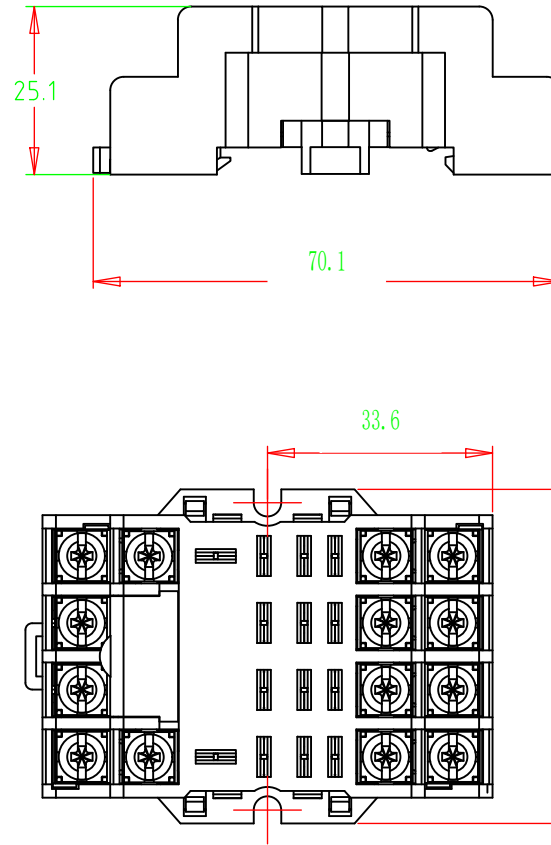

技术要求technical requirement

- 1.使用环境温度working Ambient temperature: $-40^{\circ}\text{C}\sim+85^{\circ}\text{C}$
- 2.额定负载Rated load: 300VAC 10A
- 3.介质耐压Medium voltage resistance 线圈/触点Coil/Contact: 2000 V/s; 触点间the contact space: 2000 V/s
- 4.螺钉扭矩Screw torque: 1.0 N.M
- 5.连接导线connecting lead: 20-14/0.5-2.5AWG/mm²

—	—	—
—	—	—
—	—	—
版本rev.	标记mark	处数no.

—	—	—
—	—	—
—	—	—
设计design	批准approve	日期date

未注公差undefined tol		设计design				江西航同电气科技有限公司	
0~10 0.3		审核check				Jiangxi Huntect Electrical Technology Co.,Ltd.	
>10~30 0.5		批准approve					
>30~100 1.0		材料material				通用型功率继电器插座	
>100~250 1.5		重量WT. (g)				名称 name	General Purpose Power Relay Socket
>250 1%		比例scale 1:1			型号 spc.	SRL-4E-N	
未注角度公差undefined angle 2°		第三视角 			图号 dwg No.	—	
未注尺寸公差undefined size mm		页码sheet /					