


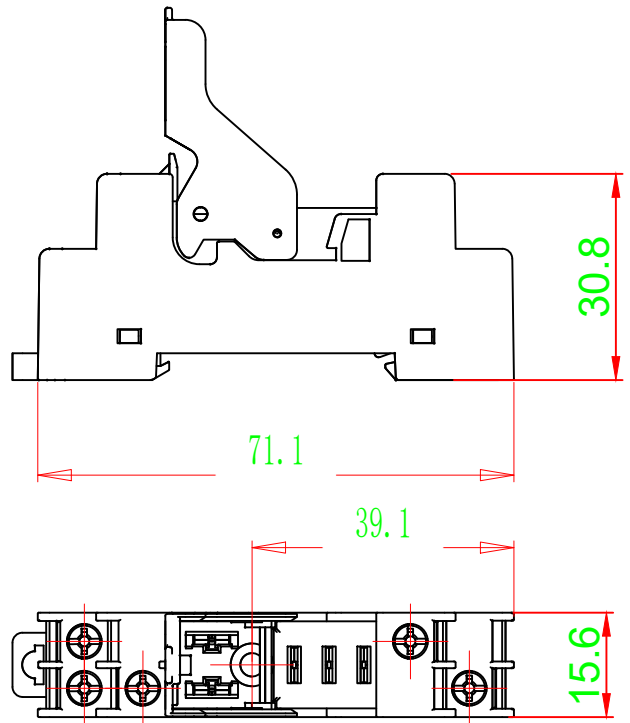

技术要求technical requirement

1.额定负载电流、电压Rated load current, voltage:16A 300VAC

2.介质耐压线圈/触点Dielectric withstand voltage coils/contacts:4000V/S

3.介质耐压触点间Dielectric withstand pressure between contacts:2500VS

4.螺钉扭矩Screw torque:1.0N.m

5.外接连接导线External connecting leads:20-14/0.5-2.5AWG/mm<sup>2</sup>

6.使用环境operating environment:-40°C~+85°C

|        |        |       |          |           |        |
|--------|--------|-------|----------|-----------|--------|
| —      | —      | —     | —        | —         | —      |
| —      | —      | —     | —        | —         | —      |
| —      | —      | —     | —        | —         | —      |
| 版本rev. | 标记mark | 处数no. | 设计design | 批准approve | 日期date |

|                          |     |             |  |                                                                                                                                                                                     |         |
|--------------------------|-----|-------------|--|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|
| 未注公差undefined tol        |     | 设计design    |  | <div></div> <div>江西航同电气科技有限公司</div> <div>Jiangxi Huntect Electrical Technology Co., Ltd.</div> |         |
| 0--10                    | 0.3 | 审核check     |  |                                                                                                                                                                                     |         |
| >10--30                  | 0.5 | 批准approve   |  |                                                                                                                                                                                     |         |
| >30--100                 | 1.0 | 材料material  |  |                                                                                                                                                                                     |         |
| >100--250                | 1.5 | 重量W.T. (g)  |  |                                                                                                                                                                                     |         |
| >250                     | 1%  | 比例scale 1:1 |  | 名称 name                                                                                                                                                                             | 插座      |
| 未注角度公差undefined angle 2° |     | 图幅size      |  | 型号 spc.                                                                                                                                                                             | Sockets |
| 未注尺寸公差undefined size mm  |     | 页码sheet /   |  | 图号dwg No.                                                                                                                                                                           | SRJ-1E  |
|                          |     |             |  | —                                                                                                                                                                                   |         |