


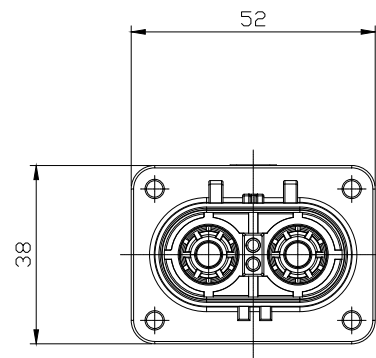

技术要求technical requirement:

产品要求Product requirements:

a. 电气性能Electrical performance:

1. 额定电压Rated voltage : 动力power:1000V DC/信号signal:300V DC.

2. 额定电流Rated current: 动力power: 120A Max/信号signal: 5A Max.

b.机械性能Mechanical properties:

1.适用线缆Applicable cables: 动力power: 25mm^2 Max/信号signal: $0.35\text{--}0.5\text{mm}^2$ 。

2. 安装锁紧扭矩 安装锁紧扭矩 Install locking torque: M3: 1.0-1.3 N.m;

c. 环境性能Environment Properties:

1.工作温度operation temperature: -40℃-125℃.

						>30--100	1.0	材料material	/	名称 name	高压连接器设备公端
						>100--250	1.5	重量WT.(g)	/	比例scale	Male end of high-voltage connector equipment
						>250	1%	第三视角 未注公差undefined angle	2° 	图幅size	A4
版本Rev.	标记mark	处数no.				设计design	批准approve	日期date	未注尺寸单位undefined size mm	型号 spc.	RES-C-25-M-B-50-0G
									页码sheet /	图号dwg No.	4001101328