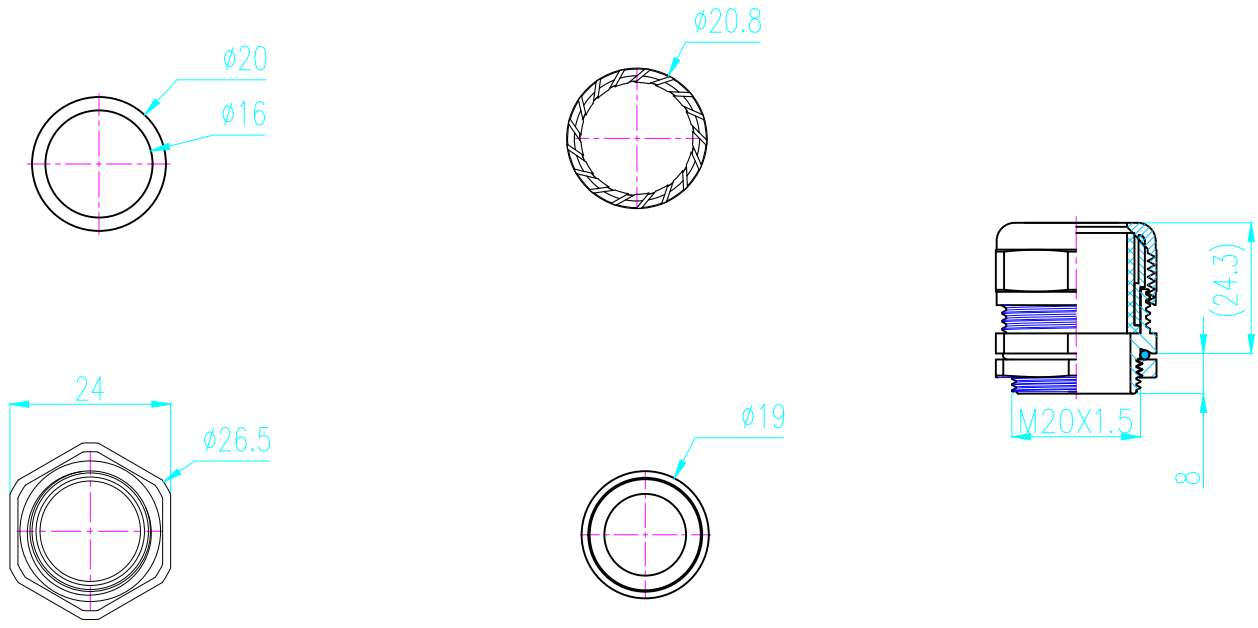


技术要求 Tech Requirements:
1.工作温度范围operating temperature: -40℃~100℃,短时short time120℃;
2.卡线卡口范围Scope of cable clamps and buckles: 6-12mm;

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol		设计design		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.			
0--10	0.3	审核check					
>10--30	0.5	批准approve					
>30--100	1.0	材料material					
>100--250	1.5	重量W.T. (g)					
>250	1%	比例scale		1:1	名称 name	普通金属防水接头	
未注角度公差undefined angle 2°		第三视角		图幅size		型号 spc.	Common metal waterproof connector
未注尺寸公差undefined size mm		3rd angle projection		页码sheet /		图号dwg No.	RSKM-M20A-C-0M