


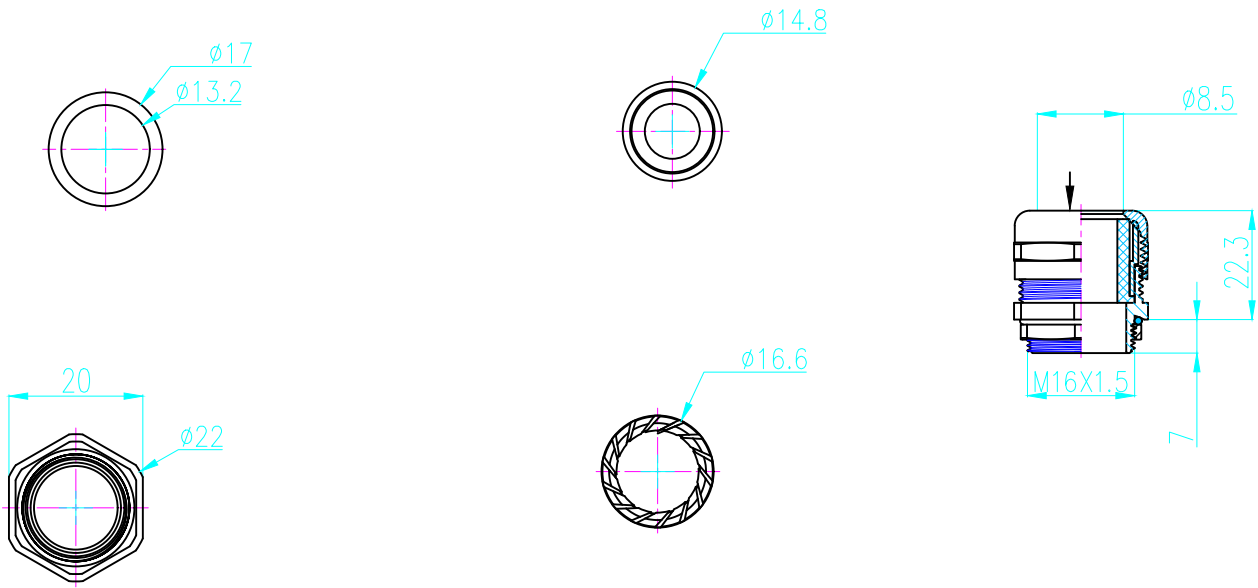

技术要求 Tech Requirements:
1.工作温度范围operating temperature: -40℃~100℃,短时short time120℃;
2.卡线卡口范围Scope of cable clamps and buckles: 4-8mm;

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol		设计design		 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
0--10	0.3	审核check			
>10--30	0.5	批准approve		普通金属防水接头 Common metal waterproof connector	
>30--100	1.0	材料material			
>100--250	1.5	重量W.T. (g)		名称 name	RSKM-M16A-C-0M
>250	1%	比例scale 1:1		型号 spc.	
未注角度公差undefined angle 2°	第三视角		图幅size	—	图号dwg No.
未注尺寸公差undefined size mm	3rd angle projection		页码sheet /		