


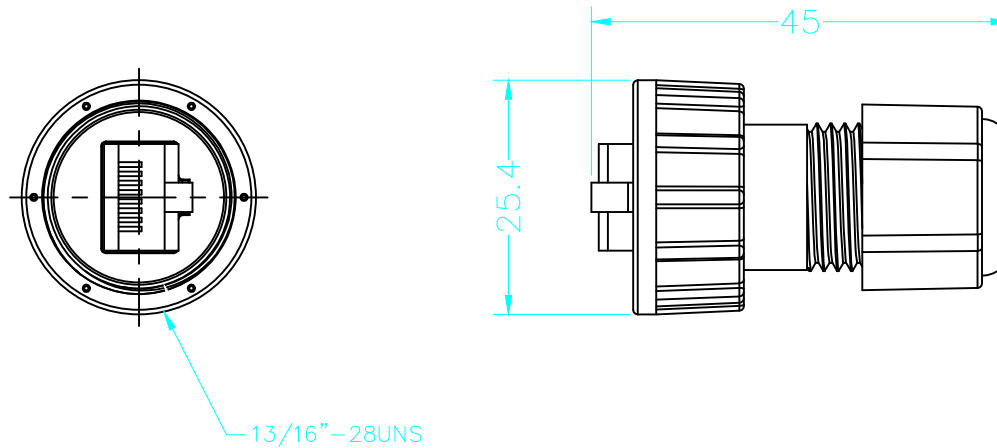

技术参数Technical parameters

1. 额定电压、电流Rated voltage and current: 125V 1.5A.
2. 绝缘耐压insulation voltage : 750V AC 1min;
3. 绝缘电阻insulation resistance : 500M Ω Min,500V DC.

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol 0--100.3 >10--300.5 >30--1001.0 >100--2501.5 >2501% 未注角度公差undefined angle2° 未注尺寸单位undefined size mm	设计design	—	—	江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	—	—		
	批准approve	—	—		
	材料material	/			名称 name
	重量W.T. (g)	/	比例scale	2:1	防水RJ45 电缆侧防水套件，含水晶头 Waterproof RJ45 cable side waterproof kit, including crystal head
第三视角  3rd angle projection		图幅size	A4	型号 spc.	RRJ45-D-C-01-260
		页码sheet	/	图号dwg No.	4402303045