


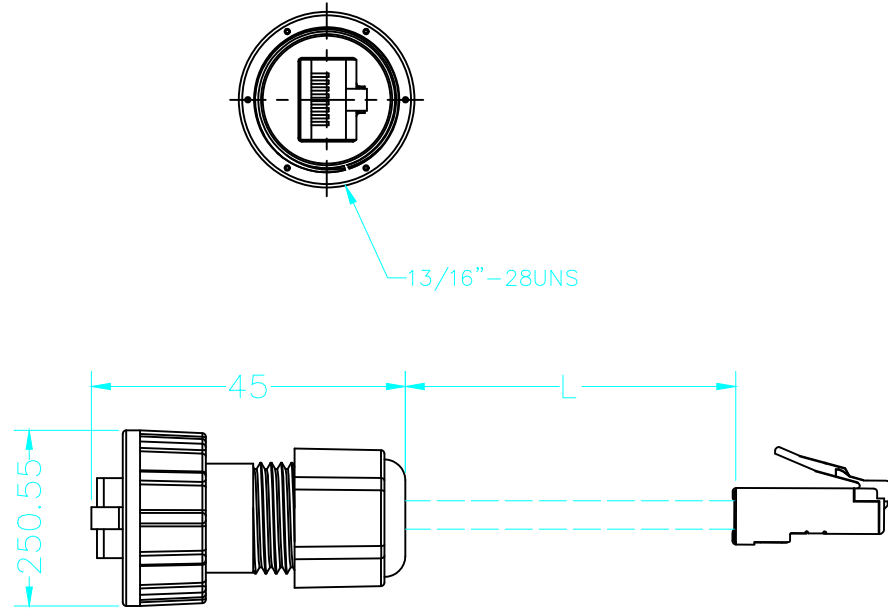

技术参数Technical parameters

1. 额定电压、电流Rated voltage and current: 125V 1.5A.
2. 绝缘耐压insulation voltage: 750V AC 1min;
3. 绝缘电阻insulation resistance: 500MΩ Min,500V DC.

—	—	—		—	—	—
—	—	—		—	—	
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol 0--10 0.3 >10--30 0.5 >30--100 1.0 >100--250 1.5 >250 1% 未注角度公差undefined angle 2° 未注尺寸单位undefined size mm	设计design	—	—	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	—	—		
	批准approve	—	—		
	材料material	/			名称 name
	重量W.T. (g)	/	比例scale	1:1	防水RJ45 电缆侧, 防水套件 Waterproof RJ45 cable side, waterproof kit
第三视角 		图幅size	A4	型号 spc.	RRJ45-W-01-XXX
3rd angle projection		页码sheet	/	图号dwg No.	4402303015