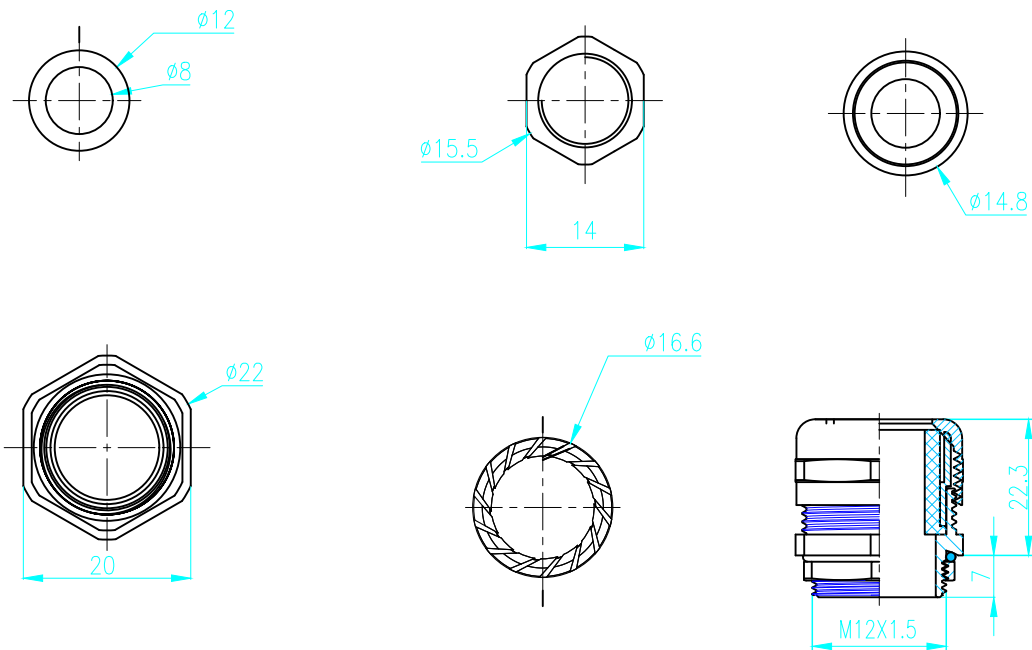


3D View

技术要求 Tech Requirements:

- 1.工作温度范围operating temperature: -40°C ~ 100°C ,短时short time 120°C ;
- 2.卡线卡口范围Scope of cable clamps and buckles: 4-8mm;

—	—	—		—	—	—
—	—	—		—	—	—
—	—	—		—	—	—
版本rev.	标记mark	处数no.		设计design	批准approve	日期date

未注公差undefined tol 0—10 0.3 >10—30 0.5 >30—100 1.0 >100—250 1.5 >250 1%	设计design	—	—		图幅size —	比例scale 1.25:1	 江西航电电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,LTD				
	审核check	—	—								
	批准approve	—	—								
	材料material	/									
	重量W.T. (g)	/	/								
未注角度公差undefined angle 2° 未注尺寸公差undefined size mm	第三视角 3rd angle projection				型号 spc.	图号 dwg No.		普通金属防水接头 Common metal waterproof connector RSKM-M12C-C-0M			