


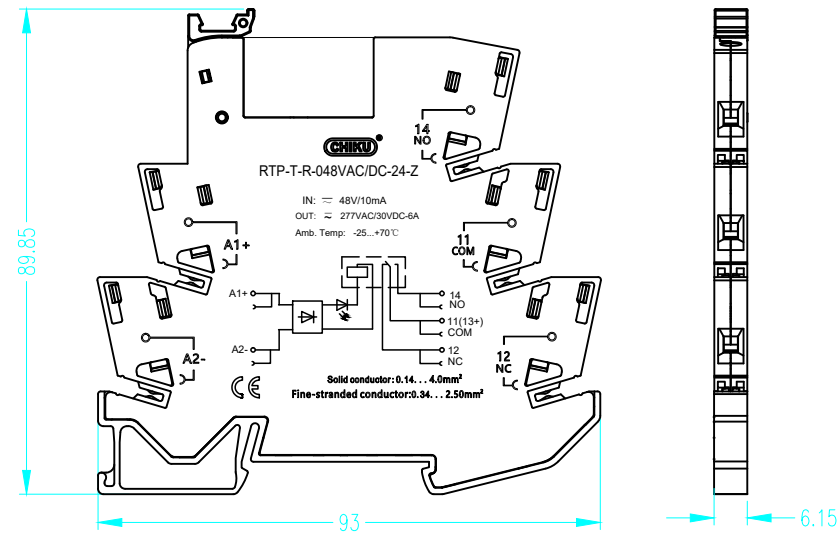

1.压线范围Wiring range : 0.14~4mm² (硬线Hard wire) ;
0.34~2.5mm² (软线flexible cord) 。

未注公差undefined tol	设计design	—	—	 江西航通电气科技有限公司 Jiangxi Huntex Electrical Technology Co.,Ltd.	
0--10 0.3	审核check	—	—		
>10--30 0.5	批准approve	—	—		
>30--100 1.0	材料material	/			
>100--250 1.5	重量W.T. (g)	/			
>250 1%		比例scale 1:1		名称 name	超薄继电器模块
未注角度公差undefined angle 2°	第二视图		图幅size A3	型号 spc.	Ultra thin relay module
未注尺寸单位undefined size mm	3rd angle projection		页码sheet /	图号dwg No.	RTP-T-R-048VAC/DC-24-Z
					—