
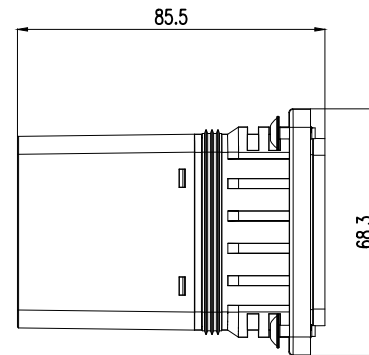





技术参数/Technical Data:


电气性能/Electrical:

- 1.额定电压/Rated Voltage: 1000V AC;
- 2.额定脉冲电压/Rated Impulse Voltage: 6KV;
- 3.额定电流/Rated Current: 50A;

环境性能/Environmental:

- 1.防护等级/IP rating: IP68;
- 2.工作温度/Operation Temperature: $-40^{\circ}\text{C} \sim +85^{\circ}\text{C}$;
- 3.防火等级/Flamming Level: UL94-V0;

-	-	-		-	-	-
-	-	-		-	-	-
-	-	-		-	-	-
版本rev.	标记mark	处数no.	变更说明 change description	设计 designed	批准approved	日期date

未注公差参考GB/T1804-c undefined tol. refer to GB/T1804-c 0.5--3 mm ± 0.2 3--6 mm ± 0.3 6--30 mm ± 0.5 30--120 mm ± 0.8 角度angle $\pm 1^{\circ}$	设计designed	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核checked	-	-		
	批准approved	-	-		
	材料material	-			产品名称型号 name & spec.
	第三视角3rd angle projection	重量WT.(g)	比例scale	图号 drawing no.	10芯接线端子 RBH100-35-10P
		图幅size	A4	页码sheet 2 / 3	10400006