
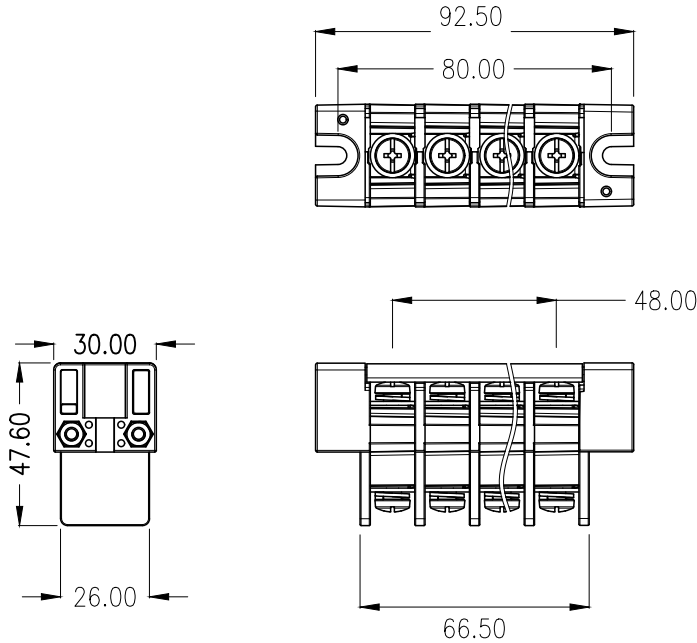


序号	产品性能参数	数值		
1	IEC标准(过电压类别/污染等级) IEC standard	Ⅱ/2	Ⅲ/2	Ⅲ/3
	额定电压 Rated voltage	1000V AC	1000V AC	1000V AC
	额定电流 Rated current	76 A	76 A	76 A
2	UL标准(应用类别) UL standard	B	C	E
	额定电压 Rated voltage	600V	600V	/
	额定电流 Rated current	75 A	75 A	/
5	环保要求 Environmental requirements	符合RoHS环保标准		
6	接线范围 Wiring range	14-3AWG/2.5-25mm ²		



未注公差undefined tol 0--10 ±0.3 >10--30 ±0.5 >30--100 ±1.0 >100--250 ±1.5 >250 ±1%	设计design	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	-	-		
	批准approve	-	-		
	材料material	见表格 see table			
重量WT. (g)	/	比例scale	1:2	型号 spc.	RBH100-75-40P-GA
未注角度公差undefined angle ±2° 未注尺寸单位undefined size mm	第三视角 	图幅size	A4	料号 PN.	-
	3rd angle projection	页码sheet 1 / 1	图号dwg No.	-	