
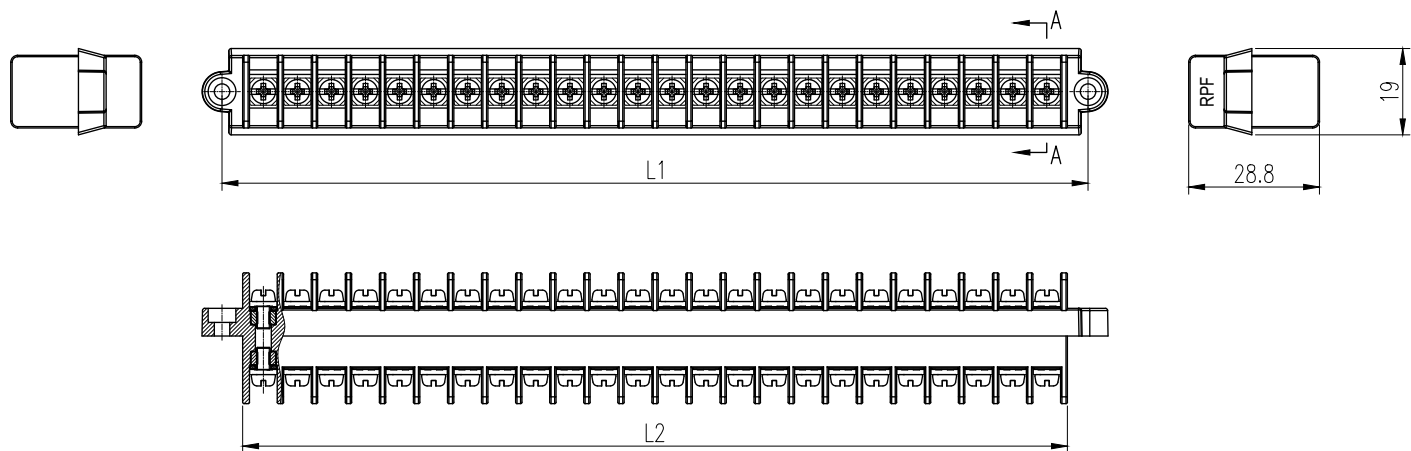


接线范围 Wiring range (mm ²)	2.5mm ²
绝缘电阻 Insulation resistance	1000MΩ
额定电压/额定电流 Rated voltage/rated current	660V/24A
工作温度 Operating temperature(℃)	-40~+105℃



RPF-9	78.2	69.2	RPF-17	138.2	129.2			
RPF-8	70.7	61.7	RPF-16	130.7	121.7	RPF-24	190.7	181.7
RPF-7	63.2	54.2	RPF-15	123.2	114.2	RPF-23	183.2	174.2
RPF-6	55.7	46.7	RPF-14	115.7	106.7	RPF-22	175.7	166.7
RPF-5	48.2	39.2	RPF-13	108.2	99.2	RPF-21	168.2	159.2
RPF-4	40.7	31.7	RPF-12	100.7	91.7	RPF-20	160.7	151.7
RPF-3	33.2	24.2	RPF-11	93.2	84.2	RPF-19	153.2	144.2
RPF-2	25.7	16.7	RPF-10	85.7	76.7	RPF-18	145.7	136.7
型号	L1	L2	型号	L1	L2	型号	L1	L2

未注公差undefined tol 0--10 ±0.3 >10--30 ±0.5 >30--100 ±1.0 >100--250 ±1.5 >250 ±1% 未注角度公差undefined angle ±2° 未注尺寸单位undefined size mm	设计design	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	-	-		
	批准approve	-	-		
	材料material	见表格 see table		名称 name	穿墙端子
	重量WT. (g)	/	比例scale 1:1.5	型号 spc.	RPF
	第三视角 3rd angle projection		图幅size A4	料号 PN.	-
			页码sheet 1/1	图号dwg No.	-