
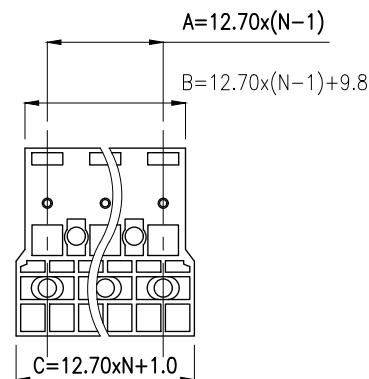




位数PIN	A	B	C	单位UNITS: MM
02	12.70	22.50	26.40	
03	25.40	35.20	39.10	
04	38.10	47.90	51.80	
05	50.80	60.60	64.50	

序号	产品性能参数	数值
1	额定电流 Rated current	60 A
2	额定电压 Rated voltage	600 V
3	工作温度 Operating temperature	-40℃-105℃
4	接线范围 Wiring range	22-8AWG/0.34-10mm ²
5	环保要求 Environmental protection requirements	符合RoHS环保标准



未注公差undefined tol 0--10 ±0.3 >10--30 ±0.5 >30--100 ±1.0 >100--250 ±1.5 >250 ±1% 未注角度公差undefined angle ±2° 未注尺寸单位undefined size mm	设计design	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	-	-		
	批准approve	-	-		
	材料material	见表格 see table		名称 name	大电流接线端子
	重量WT. (g)	/	比例scale 1:1.5	型号 spc.	RTC60-XXP-C
 第三视角 3rd angle projection	图幅size	A4	料号 PN.	-	
	页码sheet 1 / 1	图号dwg No.	-	-	