




序号	产品性能参数	数值
1	孔数X孔径 Number of holes x aperture	3X11mm+2X11mm
2	安装尺寸 Installation dimensions	59.6mmx53.6mm
3	环保要求 Environmental requirements	符合RoHS标准
4	防护等级 Degree of protection	IPX6
5	阻燃等级 Flammability	UL94-V0,UL94 HB
6	工作温度范围 Operating temperature range	-40℃-105℃

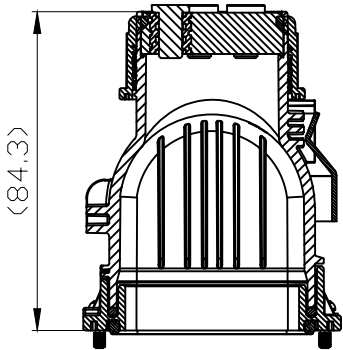


剖视图 A-A

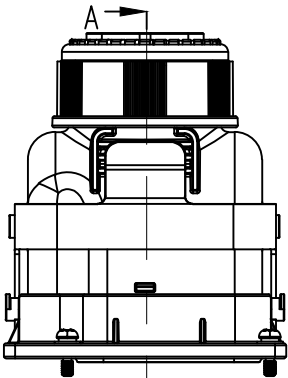

74.7

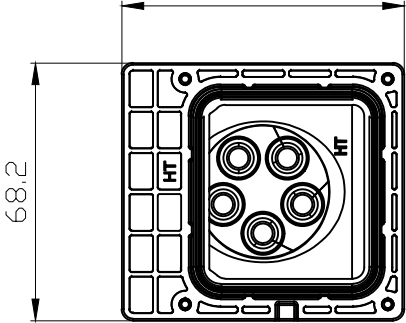

68.2

未注公差undefined tol 0--10 ±0.3 >10--30 ±0.5 >30--100 ±1.0 >100--250 ±1.5 >250 ±1% 未注角度公差undefined angle ±2° 未注尺寸单位undefined size mm	设计design	-	-	 江西航同电气科技有限公司 Jiangxi Huntect Electrical Technology Co.,Ltd.	
	审核check	-	-		
	批准approve	-	-		
	材料material	见表格 see table		名称 name	法兰式尼龙接头
	重量WT. (g)	/	比例scale 1:2	型号 spc.	RSFP-59.6x53.6D-3x11Q+2x11-BL-JS
第三视角 3rd angle projection			图幅size A4	料号 PN.	-
			页码sheet 1 / 1	图号dwg No.	-